



Two-piece elongated toilet with skirted trapway, 1.28

gpt

K-3814-RA

## **Features**

- Two-piece design
- Elongated bowl offers added room and comfort
- Skirted trapway simplifies cleaning
- Revolution 360® flushing technology generates a forceful swirling motion to keep the bowl clean longer
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Right-hand Polished Chrome trip lever
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- CleanCoat™ surface treatment inhibits the growth of water scale and mineral stains for improved ease of cleaning
- Combination consists of toilet bowl and tank
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in
- Eligible for consumer rebates in some municipalities
- 1.28 gpf (4.8 lpf)

### Installation

- Standard 12" (305 mm) rough-in
- 10" and 14" (254 mm and 356 mm) rough-in kits also available
- Seat and supply line sold separately

### Recommended Products/Accessories

K-7637 Angle Supply with Stop (single)

K-5383 10" rough-in full skirt trap and attachment system

K-5381 14" rough-in full skirt trap and attachment system

K-20120-R Trip Lever

1023457 Wax Ring/Hardware Kit

1265114 Connector Hose

K-4636-RL Cachet® ReadyLatch® Quiet-Close™ elongated

toilet seat

### **Included Components**

K-4144 Elongated toilet bowl with skirted trapway K-4143-RA Toilet tank, 1.28 gpf





### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

# KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

# Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit








Two-piece elongated toilet with skirted trapway, 1.28

gpf

K-3814-RA

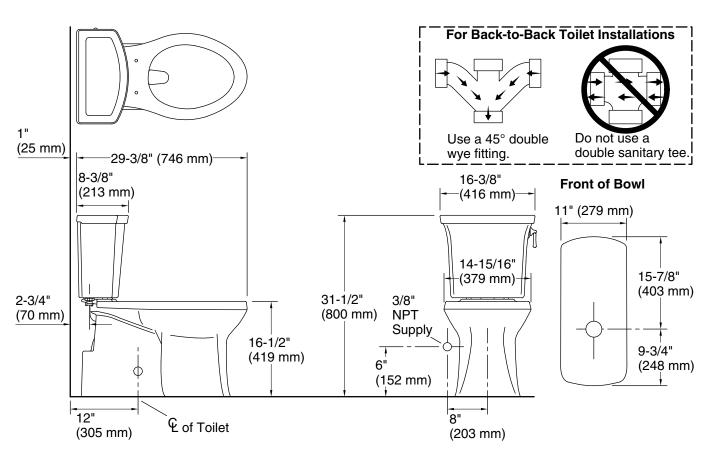

# **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated

Flush type: Revolution 360, AquaPiston

Trap passageway: 2-1/8" (54 mm)

Water surface size: 9-3/4" x 7-1/4" (248 mm x 184 mm)

Rim to water 6-1/4" (159 mm)

surface:

Rough-in: 12" (305 mm)

# **Fixture Supply Requirements**

Min static pressure: 15 psi (103.4 kPa) Max static pressure: 80 psi (551.6 kPa)

### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

