



Two-piece elongated toilet, 1.28 gpf **K-3950** 

### **Features**

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Left-hand Polished Chrome trip lever
- Combination consists of toilet bowl and tank
- Coordinates with other products in the Tresham collection
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Eligible for consumer rebates in some municipalities
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) fully glazed trapway
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush

### Installation

- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation
- Seat and supply line sold separately

### **Recommended Products/Accessories**

K-5420 Low-Profile Bolt Caps
K-9375 Trip Lever
1023457 Wax Ring/Hardware Kit
1265114 Connector Hose
K-23726 Drain treatment
K-4636-RL Cachet® ReadyLatch® Quiet-Close™ elongated toilet seat

### **Included Components**

K-4799 Elongated toilet bowl K-4899 Toilet tank, 1.28 gpf





# Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

# KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

Color Code Description


0 White





# **KOHLER**®

Two-piece elongated toilet, 1.28 gpf **K-3950** 

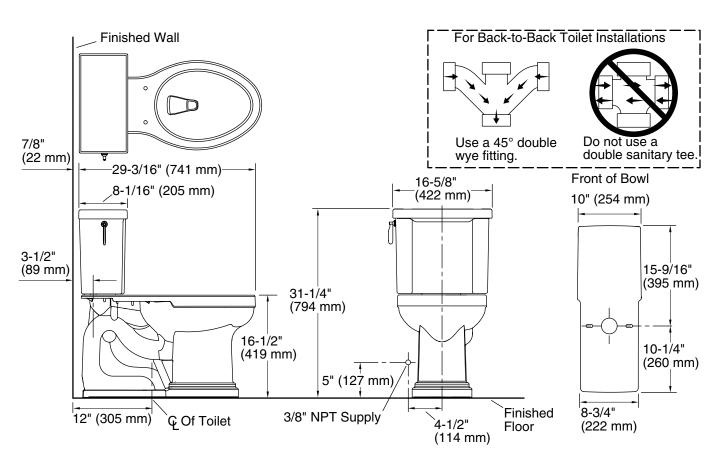

## **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: AquaPiston
Trap passageway: 2-1/8" (54 mm)

Water surface size: 11-1/2" x 9" (292 mm x 229 mm)

Rim to water 5-3/8" (137 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

