


Features

- Two-handle centerset faucet for 4" (102 mm) centers.
- 5-3/16" (132 mm) swing/rigid spout.
- Quarter-turn washerless ceramic disc valves ensure for a lifetime of durable performance.
- 1.0 gpm (3.8 lpm) maximum flow rate at 60 psi (4.14 bar).
- Free flow outlet with water flow regulator at bottom of spout.
- Vandalproof ADA-compliant wristblade handles with red and blue indexing.
- Less drain.
- Brass construction and valve bodies.

Recommended Products/Accessories

K-23723 Faucet cleaner

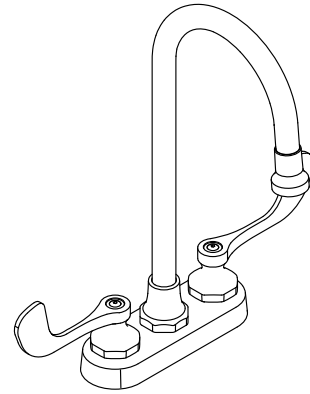

ADA **CSA B651** **OBC**

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense[®]

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

KOHLER[®] One-Year Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

 CP Polished Chrome

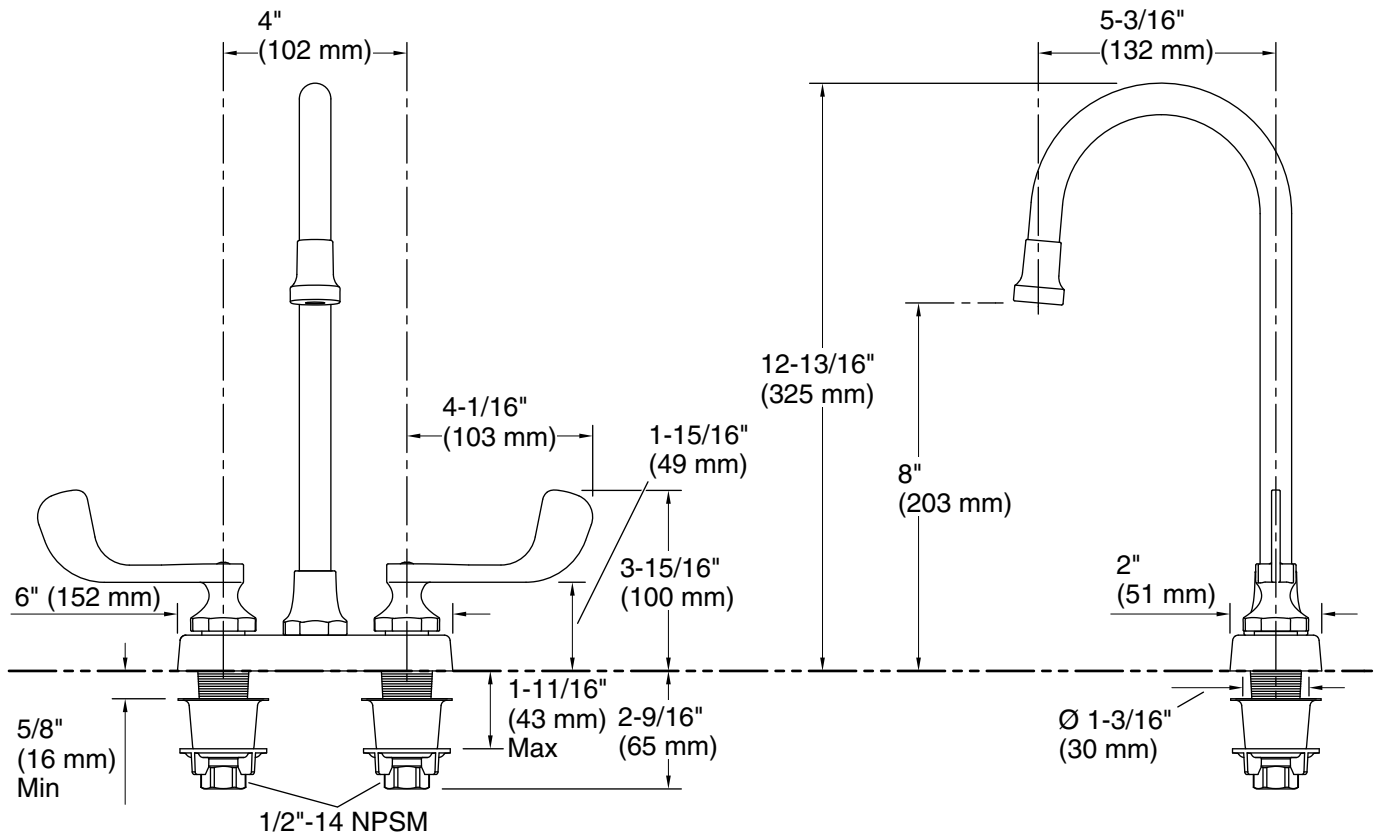

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1 gal/min (3.8 l/min)

Pressure: 60 psi (4.1 bar)

Valve body: Machined-brass

Drain included: No

Drain with overflow: No

Spout:

Spout reach: 5-3/16" (132 mm)

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.