

## Siphon-jet half-stall 0.5–1.0 gpf urinal, rear spud K-5016-ER

## **Features**

- Siphon jet
- 3/4" (19 mm) rear spud
- 0.5 or 1.0 gpf (1.9 or 3.8 lpf) based on valve selected
- Includes inlet and outlet spuds and hangers
- Includes anti-backsplash walls
- 14-1/2"(368 mm) extended rim.

#### Material

Vitreous china

## **Recommended Products/Accessories**

K-23726 Drain treatment K-23725 Cast iron cleaner





## Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	7	Black Black™



# Siphon-jet half-stall 0.5–1.0 gpf urinal, rear spud K-5016-ER

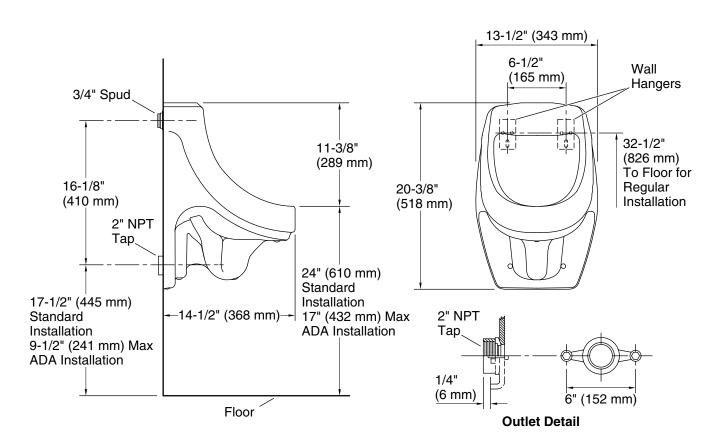

## **Technical Information**

All product dimensions are nominal.

Spud size: 3/4"", Outlet, Rear Min. Water per 0.5 gpf (1 lpf)

Flush:

Max. Water per 1 gpf (3.8 lpf)

Flush:

Designed for the above water use when installed with a water-saving flushometer.

### **Notes**

Install this product according to the installation guide.

Refer to manufacturer's instructions and local codes for flushometer requirements.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.

ADA compliant when installed to the specific requirements of these regulations.

