

**Features**

- 5-1/2 (140 mm) centers
- 1/4-turn full brass ceramic valve
- 2.0 gpm (7.6 lpm) maximum flow rate at 60 psi (4.14 bar)
- Vandal-resistant aerator
- 2-7/16" vandal-resistant metal lever handles
- Grid drain with tailpiece

**Material**

- Solid-brass construction with thick chrome plating for rough commercial applications

**Installation**

- Includes yoke for shelf-back installation

**Recommended Products/Accessories**

K-23726 Drain treatment



ADA

CSA B651

OBC

**Codes/Standards**

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 61  
NSF/ANSI/CAN 372  
DOE - Energy Policy Act 1992  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

**KOHLER® One-Year Limited  
Warranty**

See website for detailed warranty information.


**Available Colors/Finishes**

*Color tiles intended for reference only.*

**Color Code Description**



CP Polished Chrome

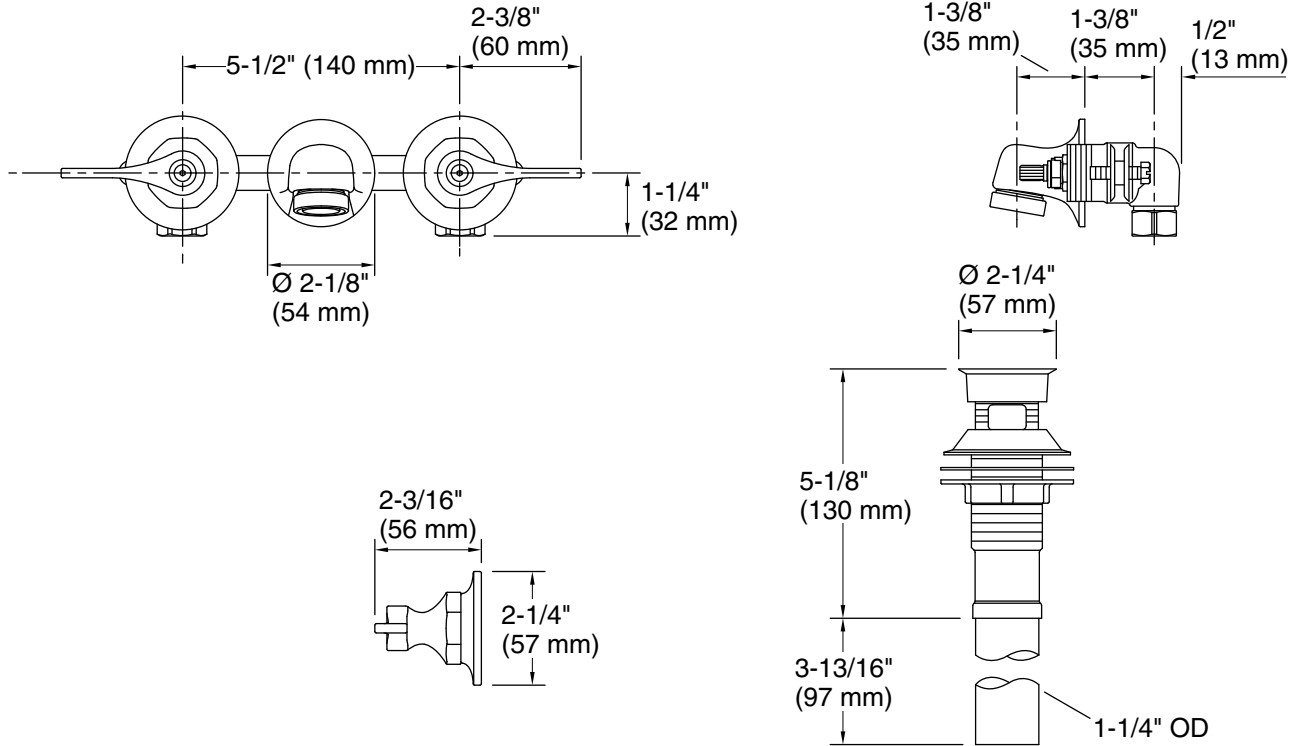

## Technical Information

All product dimensions are nominal.

Faucet flow rate: 2 gal/min (7.6 l/min)

Drain included: Yes

Drain tailpiece included: Yes

### Spout:

Spout reach: 1-1/4" (32 mm)

Handle clearance: 2-7/16" (62 mm)

## Notes

Install this product according to the installation instructions.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.