



Sunward®
66" x 42" drop-in whirlpool
K-6347

Features

- Single-speed whirlpool offers performance and value, with six fully adjustable jets
- Hydromassage flow and direction can be controlled at each jet
- Oval basin creates a spacious bathing experience
- Integral lumbar support and armrests offer extra comfort while bathing
- Textured bottom surface

Material

- Acrylic

Hydrotherapy

- Whirlpool

Installation

- Reversible drain
- Drop-in or undermount
- Smooth backside for easy handling and mounting of drain and overflow

Required Products/Accessories

K-11677 Bath Drain

Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow
K-1601 Bath/whirlpool footstop, removable
K-738 Under-Mount Install Kit - K-6346/K-6347
K-23726 Drain treatment



Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
UL 1795
UL Listed

**KOHLER® Plastic Baths and
Shower Bases Lifetime Limited
Warranty KOHLER® Hydrotherapy
Components Five-Year Limited
Warranty**

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------



	0	White
	96	Biscuit



Sunward®
66" x 42" drop-in whirlpool
K-6347



No change in measurements if connected with drain illustrated. (K-37382)

 Recommended Faucet Location

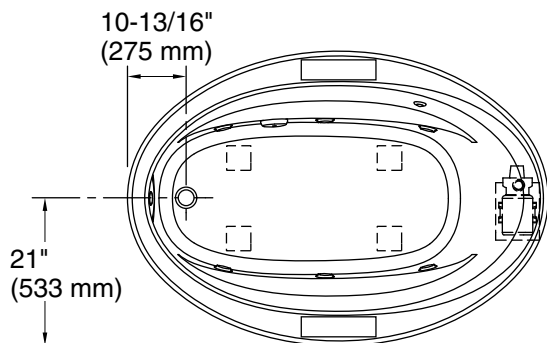

Drop-in Rim
Detail

Access Panel
20" (508 mm) W x 15" (381 mm) H

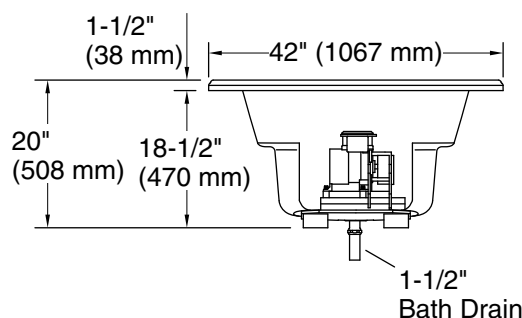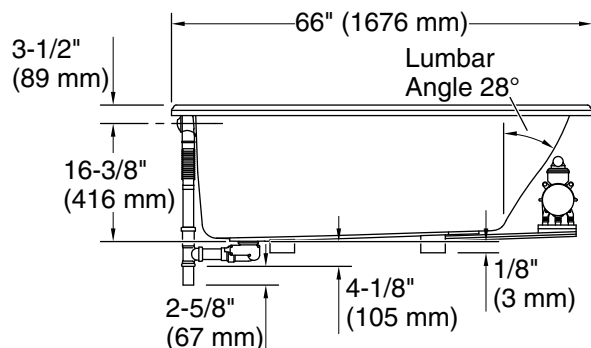

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Drain location: Reversible
Basin area, bottom: 48-5/8" x 24-1/2" (1235 mm x 622 mm)
Basin area, top: 60" x 32-3/16" (1523 mm x 818 mm)
Weight: 122 lbs (55.3 kg)
Minimum floor load: 34 lbs/ft² (166 kg/m²)
Water depth: 14-5/16" (364 mm)
Water capacity: 70 gal (265 L)
Template: Drop-in, 1233384-7, not required, included
738, not required, not included
Electrical component Pump: 120 V, 7.5 A, 60 Hz
rating:

Pump speed: Single

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com USA or www.kohler.ca Canada

9-19-2025 16:45 - US/CA

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

THE BOLD LOOK
OF **KOHLER®**