

Technology

- Frameless, 3/8-inch-thick Crystal Clear tempered glass.
- Continuous door panel guide mechanism for smooth, quiet sliding action.
- Gently curved inside and outside towel bars.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- Out-of-plumb adjustability for easy installation.

Installation

- Not for use in hospitality.
- For residential use only.

Recommended Products/Accessories

- K-9549 48" x 34" Shower Base
- K-9567 48" x 48" Shower Base

Included Components

- Additional Components:
Hardware kit



Codes/Standards

- CPSC 16CFR 1201
- ANSI Z97.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|--|-----|--|
| | SHP | |
|--|-----|--|


| | | |
|--|----|--|
| | NX | |
|--|----|--|

| | | |
|--|-----|--|
| | ABV | |
|--|-----|--|

Available Glass Options

| Code | Description |
|------|-------------|
|------|-------------|

| | |
|---|---------------|
| L | Crystal Clear |
|---|---------------|

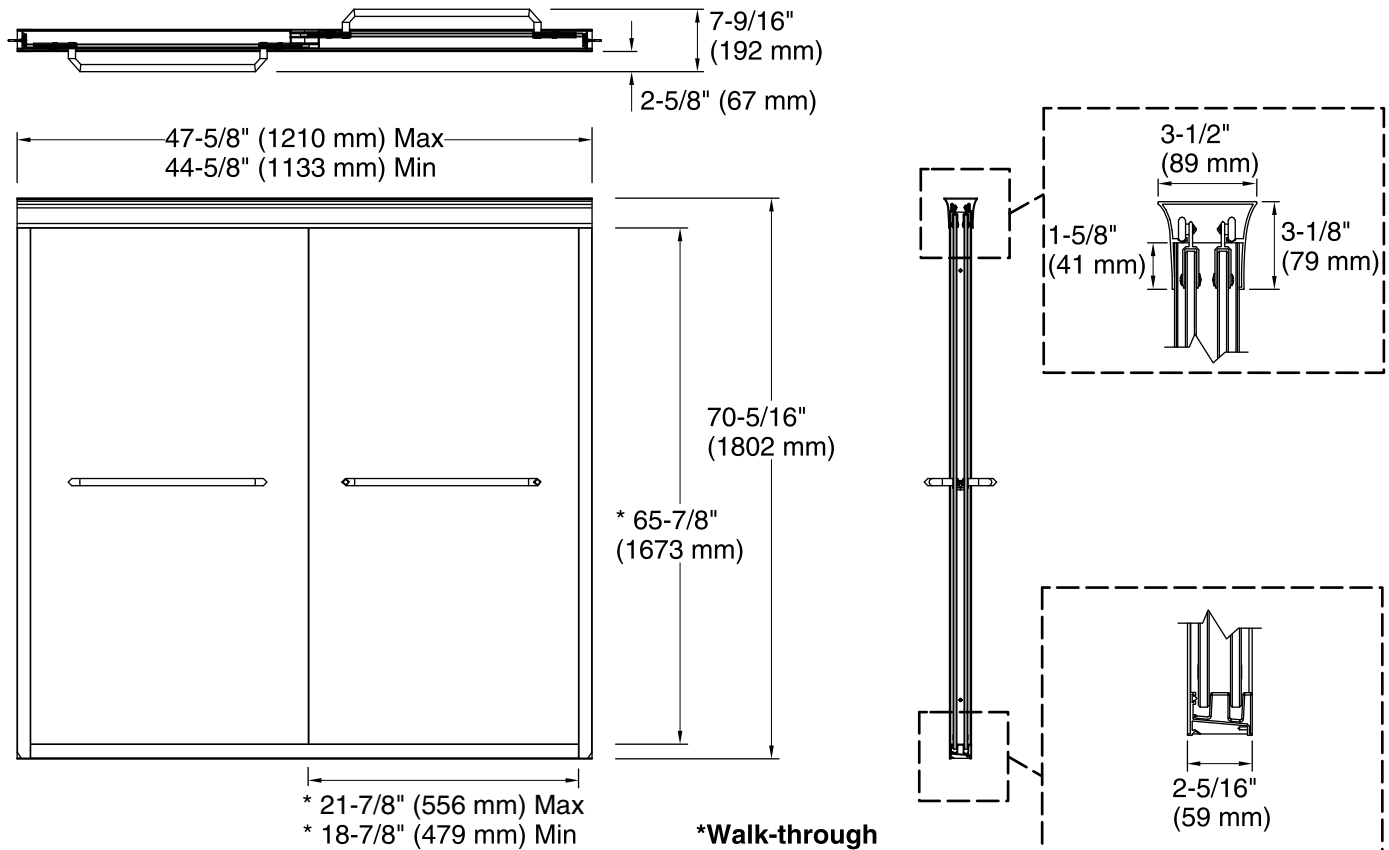

Technical Information

All product dimensions are nominal.

| | |
|----------------------|------------------------------|
| Installation type: | For shower base installation |
| Opening style: | Sliding/Bypass |
| Opening Width - Min: | 44-5/8" (1133 mm) |
| Opening Width - Max: | 47-5/8" (1210 mm) |
| Walk-through - Min: | 18-7/8" (479 mm) |
| Walk-through - Max: | 21-7/8" (556 mm) |
| Glass thickness: | 3/8" (10 mm) |
| Glass coating: | CleanCoat® |

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 72-1/16" (1830 mm) to allow for installation clearance.