

Technology

- Frameless, 1/2-inch-thick Crystal Clear tempered glass.
- Includes sidelite panel.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- Out-of-plumb adjustability for easy installation.
- Can be installed to open to the left or right.
- Includes K-705756 glass, K-705768 handle, and K-705763 hardware components.
- Coordinates with Pinstripe faucets and accessories.

Installation

- Not for use in hospitality.
- For residential use only.

Included Components

Product consists of:

- K-705756-L Glass Panel and Sidelite
- K-705763 Shower Door Assembly Kit
- K-705768 Shower Door Handles



Codes/Standards

CPSC 16CFR 1201
ANSI Z97.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|--|-----|--|
| | SHP | |
|--|-----|--|



| | | |
|--|----|--|
| | NX | |
|--|----|--|

| | | |
|--|-----|--|
| | ABV | |
|--|-----|--|

Available Glass Options

| Code | Description |
|------|-------------|
|------|-------------|

| | |
|---|---------------|
| L | Crystal Clear |
|---|---------------|

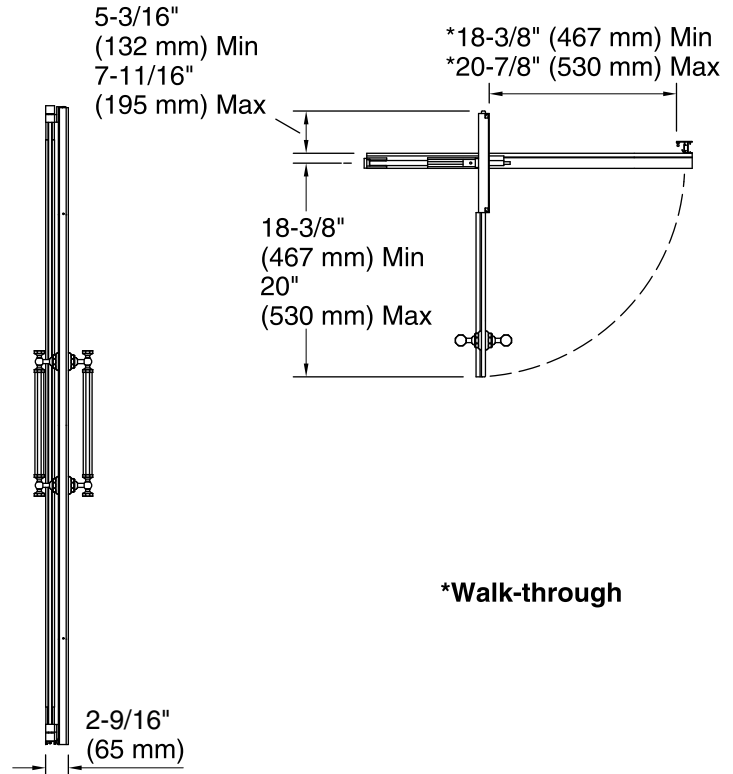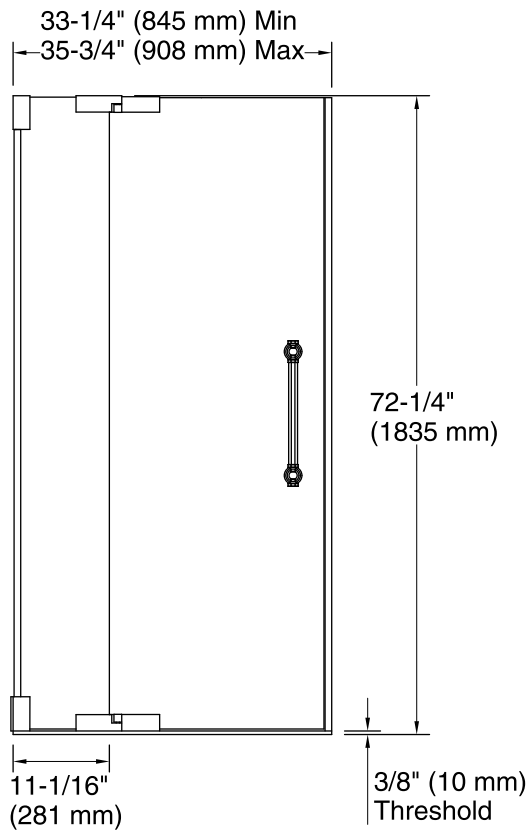

Technical Information

All product dimensions are nominal.

| | |
|----------------------|------------------------------|
| Installation type: | For shower base installation |
| Opening style: | Pivot |
| Opening Width - Min: | 33-1/4" (845 mm) |
| Opening Width - Max: | 35-3/4" (908 mm) |
| Walk-through - Min: | 18-3/8" (467 mm) |
| Walk-through - Max: | 20-7/8" (530 mm) |
| Glass thickness: | 1/2" (13 mm) |
| Glass coating: | CleanCoat® |

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 74-1/4" (1886 mm) to allow for installation clearance.