

### Technology

- Semi-frameless, 3/8-inch-thick Crystal Clear tempered glass.
- Includes sliding steam transom.
- Inside and outside solid 12-inch handles.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- Adjustable framing system simplifies installation for out-of-plumb shower openings.
- Can be installed to open to the left or right.

### Installation

- Not for use in hospitality.
- For residential use only.

### Included Components

Additional Components:

- Hardware kit
- steam-sealing kit



### Codes/Standards

CPSC 16CFR 1201  
ANSI Z97.1

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

SH


NX

ABV

### Available Glass Options

Code	Description
------	-------------

L Crystal Clear

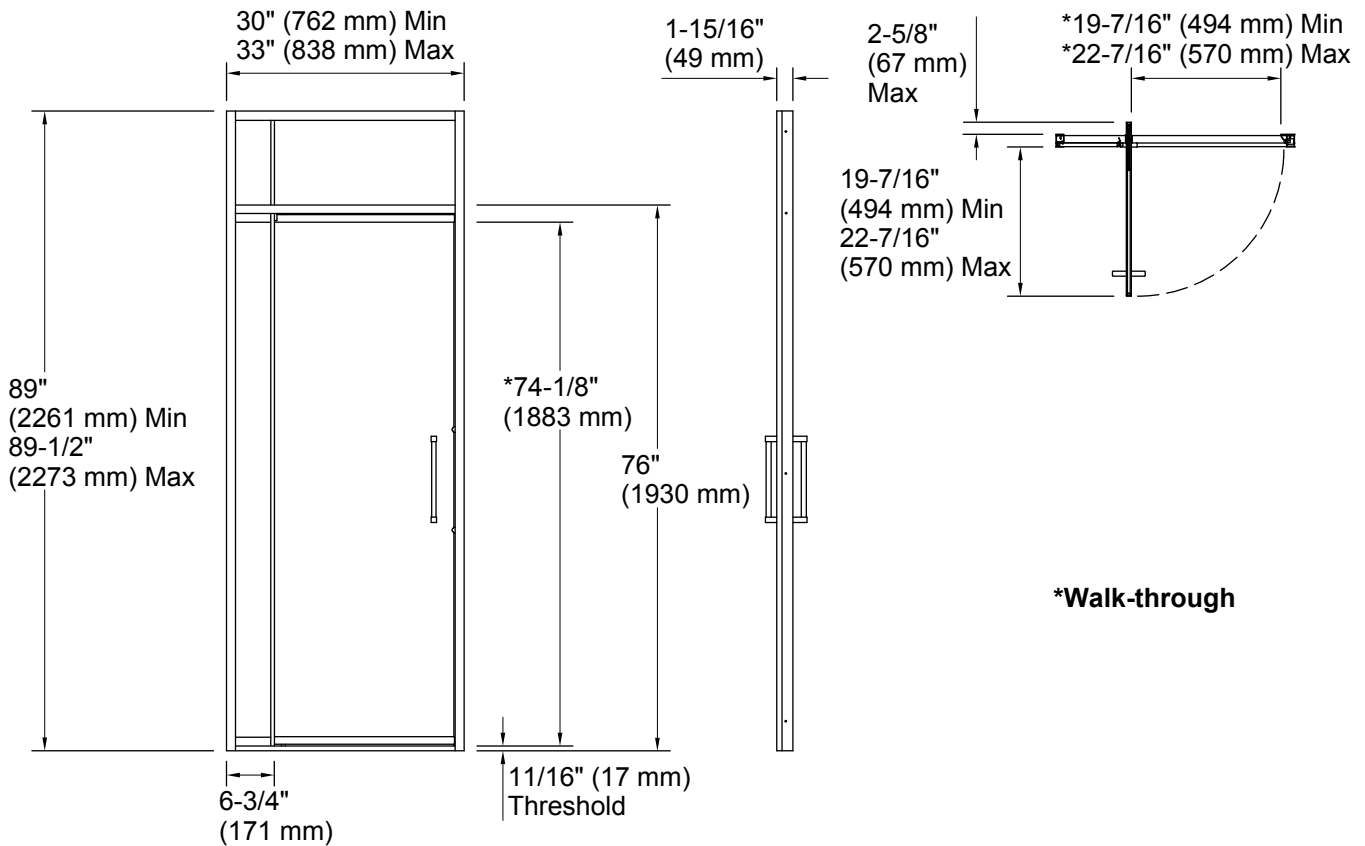

### Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Pivot

Opening Width - Min: 30" (762 mm)

Opening Width - Max: 33" (838 mm)

Walk-through - Min: 19-7/16" (494 mm)

Walk-through - Max: 22-7/16" (570 mm)

Glass thickness: 3/8" (10 mm)

Glass coating: CleanCoat®

### Notes

Install this product according to the installation guide.

Recommended two person installation.

The vertical opening should be a minimum of 90-1/8" (2289 mm) to allow for installation clearance.