



# Levity®

## Frameless Sliding Shower Door

### K-706015-D3

#### Features

- Frameless 1/4" (6 mm) thick frosted tempered glass
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed
- Cushioned center guide provides smooth, quiet sliding action
- Gently curved towel bars, inside and outside, provide integrated storage on the door
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Tempered glass ensures enhanced safety and durability

#### Installation

- Sliding shower door
- Not for use in hospitality



#### Codes/Standards

ANSI Z97.1  
CAN/CGSB-12.1  
CPSC 16CFR 1201

#### KOHLER® Bath and Shower Doors Ten-Year Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description   |
|-------------------------------------------------------------------------------------|------|---------------|
|  | SH   | Bright Silver |
|  | MX   | Matte Nickel  |
|  | BL   | Matte Black   |

#### Available Glass Options

| Code | Description |
|------|-------------|
| D3   | Frosted     |




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

11-3-2025 20:01 - US/CA

THE BOLD LOOK  
OF **KOHLER®**

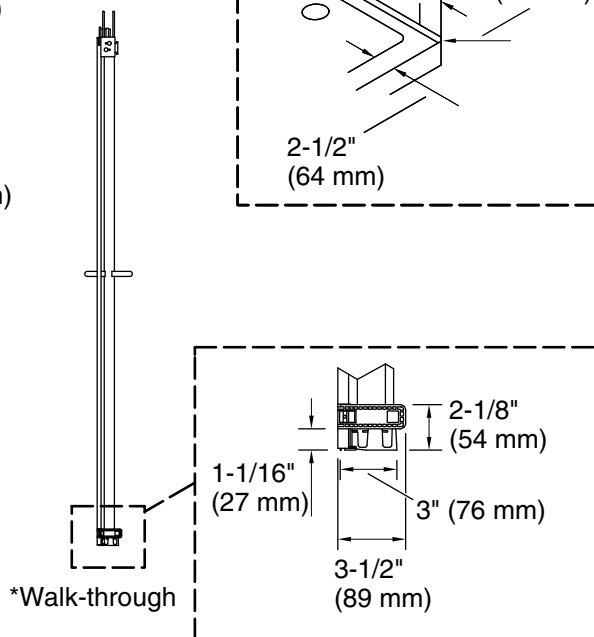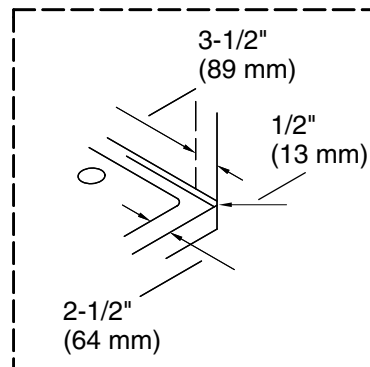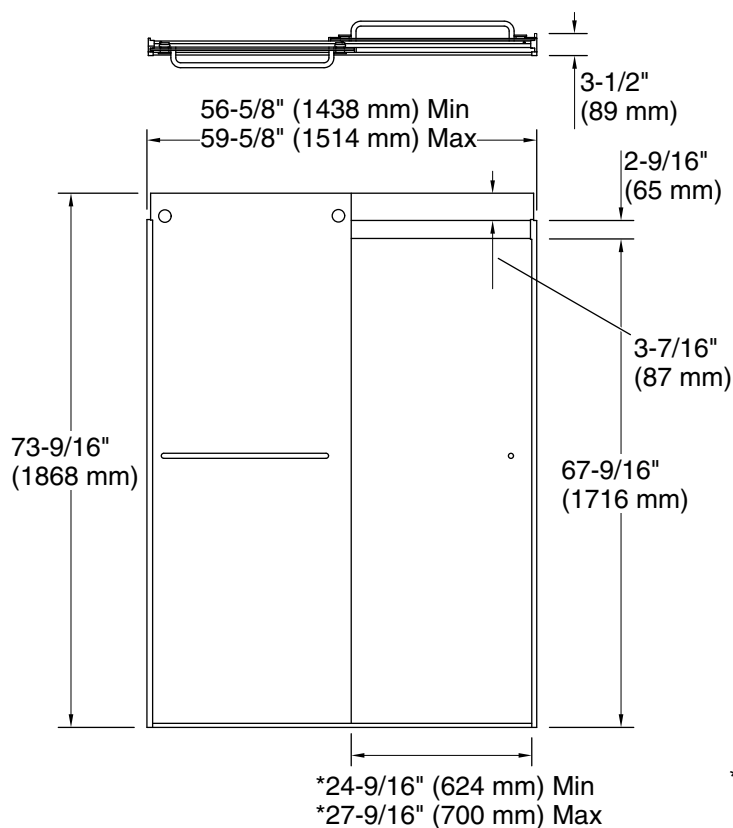

## Technical Information

All product dimensions are nominal.

|                  |                |
|------------------|----------------|
| Base-To-Wall     | 1/2" (13 mm)   |
| Radius – Max:    |                |
| Shower Ledge Min | 2-1/2" (64 mm) |
| Flat:            |                |
| Shower Wall Min  | 3-1/2" (89 mm) |
| Flat:            |                |

## Notes

Install this product according to the installation guide.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 76-1/2" (1943 mm) to allow for installation clearance.