

Features

- Combines with K-706080-ML moving panel to create complete K-706080-L shower door.

Material


- Frameless, heavy 3/8" (10 mm) thick Crystal Clear tempered glass fixed panel.
- Anodized aluminum hardware prevents rusting or corrosion.

Technology

- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.

Installation

- 78" (1981 mm) high.
- For residential use only.
- Not for use in hospitality.

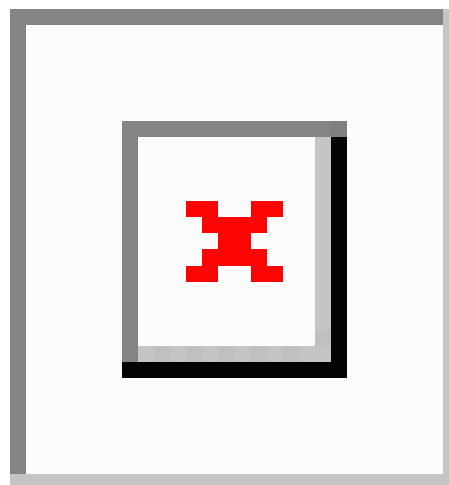

Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

SHP

Available Glass Options

Code Description

L Crystal Clear



Composed®
fixed panel shower door
K-706080-FL



Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 44-5/8" (1134 mm)

Opening Width - Max: 47-7/8" (1216 mm)

Walk-through - Min: 17" (432 mm)

Walk-through - Max: 19-11/16" (500 mm)

Shower Base Radius 3/8" (10 mm)

- Max:

Glass thickness: 3/8" (10 mm)

Glass coating: CleanCoat®

Notes

The vertical opening should be a minimum of 80" (2032 mm) to allow for installation clearance.