

Features

- Combines with K-70608-FL fixed panel to create complete K-706080-L shower door.

Material


- Frameless, heavy 3/8" (10 mm) thick Crystal Clear tempered glass movable panel.
- Anodized aluminum hardware prevents rusting or corrosion.

Technology

- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.

Installation

- 78" (1981 mm) high.
- For residential use only.
- Not for use in hospitality.

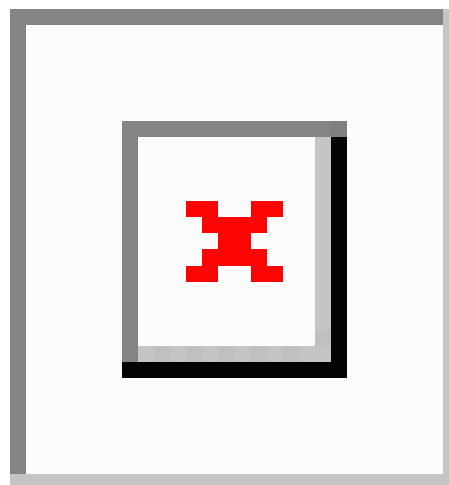

Codes/Standards

CPSC 16CFR 1201
ANSI Z97.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	SHP	
--	-----	--

Available Glass Options

Code	Description
------	-------------

L	Crystal Clear
---	---------------



Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 44-5/8" (1134 mm)

Opening Width - Max: 47-7/8" (1216 mm)

Walk-through - Min: 17" (432 mm)

Walk-through - Max: 19-11/16" (500 mm)

Shower Base Radius 3/8" (10 mm)

- Max:

Glass thickness: 3/8" (10 mm)

Glass coating: CleanCoat®

Notes

The vertical opening should be a minimum of 80" (2032 mm) to allow for installation clearance.