

# **Levity**®

# Frameless Sliding Shower Door K-706375-L

#### Material

- Anodized aluminum hardware prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

# **Technology**

- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability.
- Frameless, 5/16" (8 mm) thick Crystal Clear tempered glass door.
- Door tracking system features a hidden, cushioned, center guide for smooth, quiet sliding action.
- Smooth, easy-to-clean wall jambs.
- Vertical blade handles accentuate the contemporary style.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.

### Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.
- Not for use in hospitality.
- For residential use only.

## **Included Components**

Additional Components:

Hardware kit



# Codes/Standards

CPSC 16CFR 1201

# **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

**Color Code Description** 

SHP

NX

ABZ

# Available Glass Options


**Code Description** 

L Crystal Clear





# Levity® Frameless Sliding Shower Door

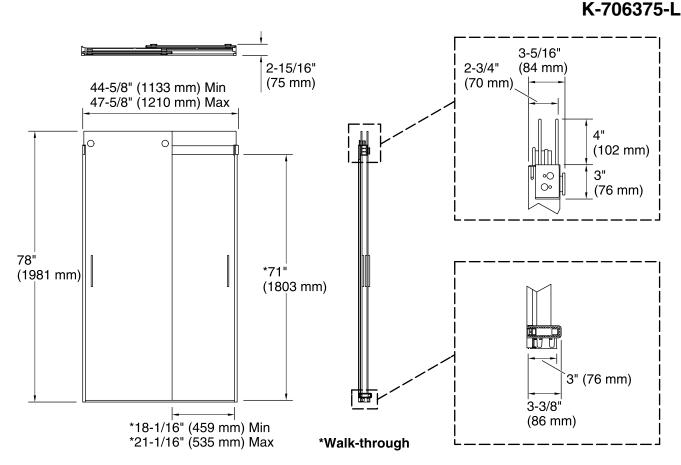

# **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Sliding/Bypass
Opening Width - Min: 44-5/8" (1133 mm)
Opening Width - Max: 47-5/8" (1210 mm)
Walk-through - Min: 18-1/16" (459 mm)
Walk-through - Max: 21-1/16" (535 mm)
Glass thickness: 5/16" (8 mm)
Glass coating: CleanCoat®

#### **Notes**

Install this product according to the installation instructions.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 80-1/2" (2045 mm) to allow for installation

clearance.

