

KOHLER

Revel® Frameless Sliding Shower Door K-707106-L

Features

- Taller, 76" (1930 mm) door height better showcases the space for taller shower applications
- Center-guided mechanism for smooth, quiet sliding action and easy cleaning
- Contemporary towel bar and knob combination offers storage on the outside of the door without encroaching on the bathing space
- Low bottom track creates easy entry and exit to the bathing space
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Tempered glass ensures enhanced safety and durability

Material

 Frameless, heavy 5/16" (8 mm) thick Crystal Clear tempered glass

Technology

Frameless design with minimal metal allows for greater ease of cleaning

Installation

- Out-of-plumb adjustability simplifies installation
- Sliding shower door
- Not for use in hospitality
- For residential use only



Codes/Standards

ANSI Z97.1 CAN/CGSB-12.1 CPSC 16CFR 1201

KOHLER® Bath and Shower Doors Ten-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver
	ABZ	Anodized Dark Bronze
1	BNK	Anodized Brushed Nickel

Available Glass Options Code Description


L Crystal Clear








Frameless Sliding Shower Door K-707106-L

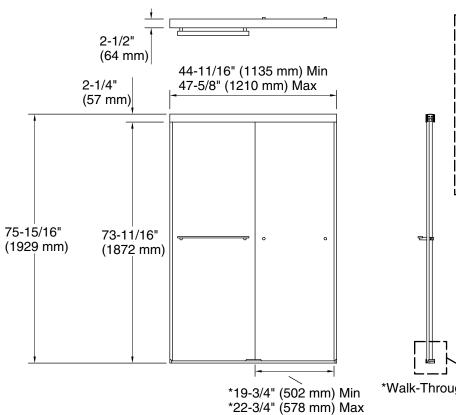

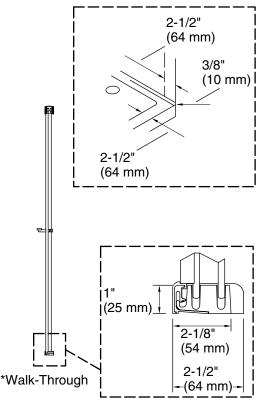

Technical Information

All product dimensions are nominal.

Base-To-Wall 3/8" (10 mm)

Radius - Max:

Shower Ledge Min 2-1/2" (64 mm)

Flat:

Shower Wall Min 2-1/2" (64 mm)

Flat:

Notes

Install this product according to the installation guide.

Wall jambs are made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 78-1/2" (1994 mm) to allow clearance for installing the top track over the wall jambs.

The vertical opening should be a minimum of 78-1/2" (1994 mm) to allow for installation clearance.

