

## **Composed®**

## Single-hangle Bathroom Sink Faucet K-73158-4

### **Features**

- Joystick handle allows for both on/off actuation and temperature setting.
- KOHLER ceramic disc valves exceed industry longevity standards over two times for a lifetime of durable performance.
- Temperature memory allows faucet to be turned on and off at any temperature setting.
- Pair with Composed faucets, accessories and showering components to coordinate a full bathroom.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.1 bar)]

#### Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

## Installation

- Flexible supply connections for easy installation.
- Single-hole mounting.
- Not for use on sinks with centerset drillings.





**CSA B651** ADA

## Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense®

California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 **OBC** 

## **KOHLER® Faucet Lifetime Limited** Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

Color Code Description

Polished Chrome CP


TT **Titanium** 





# **Composed®**

# Single-hangle Bathroom Sink Faucet K-73158-4

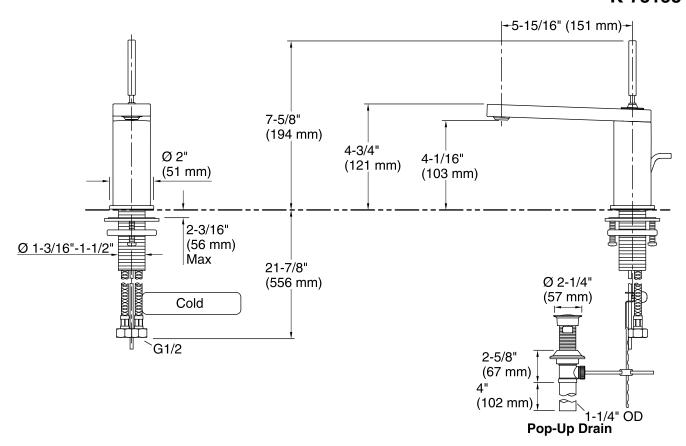

## **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Valve body: Cast brass

Drain with overflow: Yes
Drain tailpiece Yes

included:

Spout:

Spout reach: 5-15/16" (151 mm)

### **Notes**

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

