KOHLER, Faucets

Features

- Valvet[®] valves.
- Adjustable flanges.
- For 8" (203 mm) centers.
- Stationary gooseneck spout.
- Lever handles.
- 5-3/16" (132 mm) spout reach.
- 1/2" NPT inside threaded inlets.
- Lower flow aerator options available (refer to the Kohler Price Book).
- 2.2 gal/min (8.3 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

Material

- Brass construction.
- Brass valve bodies.

Optional Products/Accessories

1160594 .35 gpm Aerator, Large



CSA B651 ADA

Codes/Standards ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations ADA ICC/ANSI A117.1 CSA B651

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

CP


Polished Chrome




Triton® **Utility Sink Faucet** K-7320-4

KOHLER. Faucets

Triton® Utility Sink Faucet K-7320-4

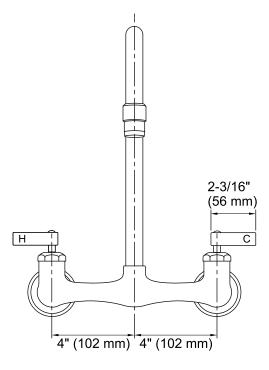

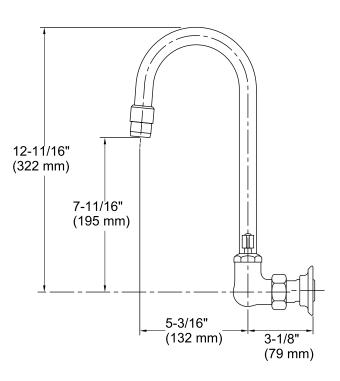

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate:

Pressure: **Spout:**

60 psi (4.1 bar)

Spout reach:

5-3/16" (132 mm)

2.2 gal/min (8.3 l/min)

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

