

Components™ Single-handle bathroom sink faucet

K-77958-4AMU

## Features

- Limited Edition Manchester United collection.
- 5.1" (129 mm) spout reach.
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar).
- Single pin handle allows for both volume and temperature control.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- Coordinates with Components faucets, accessories, and showering components to complete your bathroom.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.

## Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

## Installation

- Single hole.
- Preattached flexible supply lines simplify installation.

## Water Conservation & Rebates

 This product can help a building earn Water Efficiency points in LEED<sup>®</sup> Green Building Rating System.

## **Recommended Products/Accessories**

K-23726 Drain treatment K-23723 Faucet cleaner

## **Included Components**

Additional Components: K-7124-A Pop-Up Clicker Drain





## **Codes/Standards**

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

## KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description

BLR Matte Black with Red accents






# KOHLER. Faucets

## **Components**<sup>™</sup>

Single-handle bathroom sink faucet K-77958-4AMU

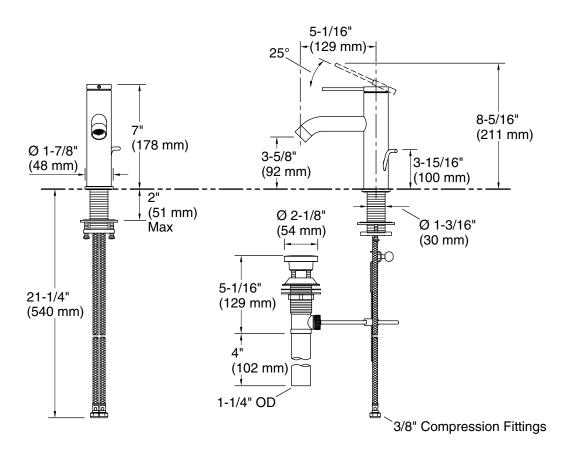

## **Technical Information**

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure:

60 psi (4.1 bar) Yes

Drain included:

Spout: Spout reach:

5-1/16" (129 mm)

#### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

