

Features

- Water-saving 1.0 gpf (3.8 lpf) flush valve uses 22% less water than 1.28 gpf (4.8 lpf) flush valves.
- 125-micron filter protects internal components.
- High back pressure vacuum breaker.
- Locking stop cap and nonhold open design provide protection against vandalism.
- No external flush volume adjustment ensures water conservation.
- Chloramine and chlorine resistance on all rubber components exposed to waterway.

Material

- Brass construction with durable Polished Chrome finish.

Technology

- Double seal handle design for long life without leaks.
- Patented piston technology for superior flush volume accuracy.
- Nonhold open piston technology for accurate activation.

Installation

- For toilet installations with 1-1/2" top spud coupling connection.
- Can be installed for left- or right-handed users.

Recommended Products/Accessories

K-23723 Faucet cleaner



ADA

CSA B651

OBC

Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37
EPA WaterSense®
ADA
ICC/ANSI A117.1
CSA B651
OBC


KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|---|----|-----------------|
|  | CP | Polished Chrome |
|---|----|-----------------|

*10-3/4" (273 mm) minimum with a
6" (152 mm) critical level above the fixture

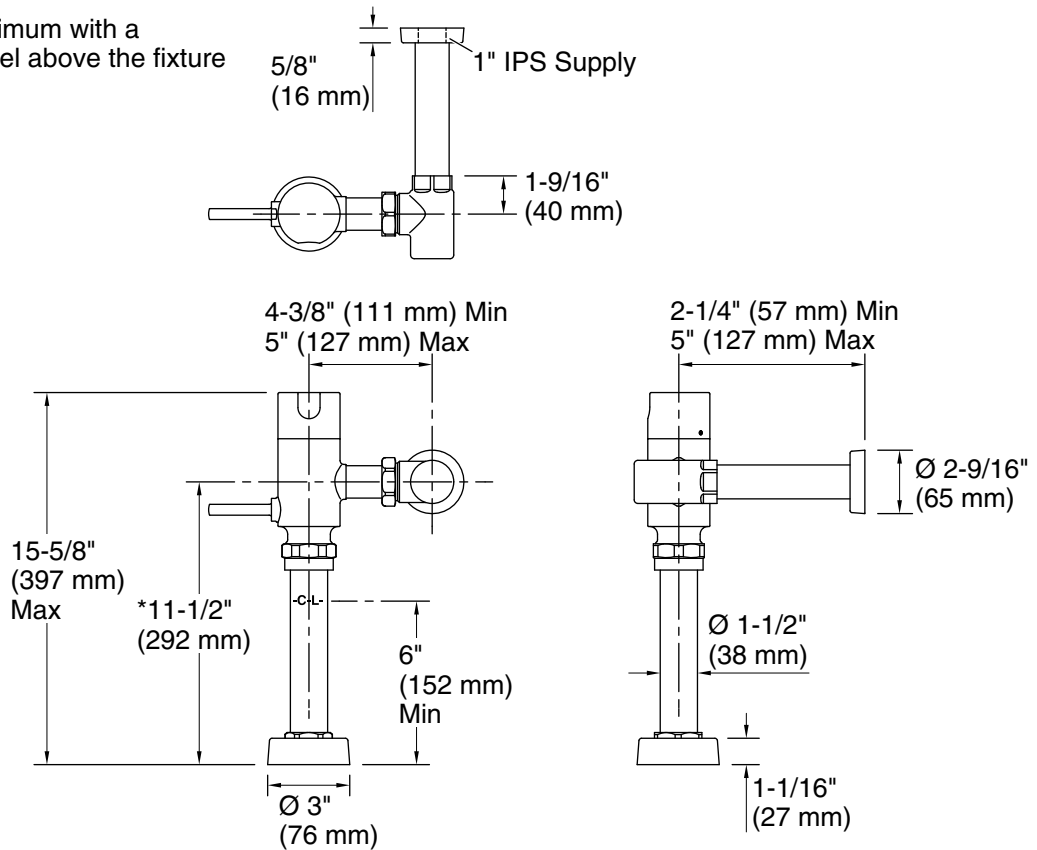

Technical Information

All product dimensions are nominal.

Pressure/fixture Supply Requirements

| | |
|-----------------------------------|--------------------|
| Fixture pressure max (static): | 80 psi (551.6 kPa) |
| Fixture pressure min (static): | 35 psi (241.3 kPa) |
| Min flowing pressure: | 25 psi (172.4 kPa) |
| Min flow rate: | 25 gpm (94.6 lpm) |

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.