



5.5' BubbleMassage™ Bath K-820-G96

Features

- 44 airjets release thousands of bubbles that surround, support, and massage the body.
- Variable-speed blower lets you adjust massage intensity to 18
- Zones of Control feature allows you to target massage to back, midsection, or feet.
- Lighted keypad.
- Sloped lumbar support on both ends.
- Safeguard slip-resistant surface on bath floor.
- Immediate and manual purge cycles remove residual water from air channels after use.
- Coordinates with other products in the Rêve collection.

Material

KOHLER® enameled cast iron.

Hydrotherapy

BubbleMassage

Installation

Drop-in or under-mount.

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-136 Bath/BubbleMassage™ Under-mount Kit K-1705 Whirlpool/BubbleMassage™ Remote Control K-9498 3" Keypad Trim



Codes/Standards

ASME A112.19.1/CSA B45.2 ASME A112.19.7/CSA B45.10 ASTM F462 UL 1795 CSA C22.2 No. 218.2

KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty **KOHLER® Hydrotherapy Components Five-Year Limited Warranty**

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description 96







5.5' BubbleMassage™ Bath K-820-G96

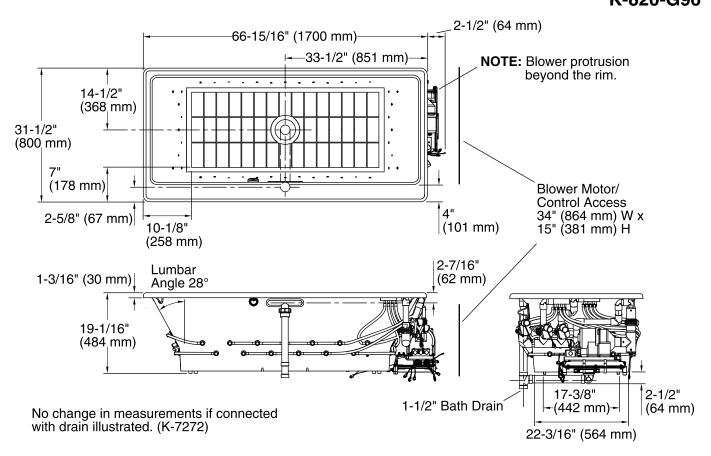

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America. this device may be known as a Residual Current Device (RCD).

240 V, 15 A, 50/60 Hz Blower:

Technical Information

All product dimensions are nominal.

Drop-in, Under-mount Installation:

Drain location: Center

62-1/2" x 24-3/4" (1588 mm x 629 mm) Basin area, bottom:

49" x 22" (1245 mm x 559 mm) Basin area, top:

Weight: 400 lbs (181.4 kg) Minimum floor load: 78 lbs/ft² (380.8 kg/m²)

Water depth: 19" (483 mm) Water capacity: 75 gal (283.9 L)

Drop-in, 66-1/2" x 31" (1689 mm x Cutout:

787 mm)

Electrical component Blower: 240 V, 5 A, 50/60 Hz

rating:

Blower speed: Variable

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

If relocating the blower motor, do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly. Provide access for servicing the blower.



