



#### **Features**

- Low-threshold design for easy entry and exit
- Molded-in textured floor
- Water containment bead incorporated into threshold design provides an optimum barrier, preventing water from escaping from shower space
- Single threshold for alcove installation
- Coordinates with Choreograph® shower walls and other KOHLER® collections



#### Material

Acrylic

### Installation

Left drain

#### Recommended Products/Accessories

K-9132 Shower Drain K-23726 Drain treatment

#### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662

# **KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty**

See website for detailed warranty information.


#### **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey





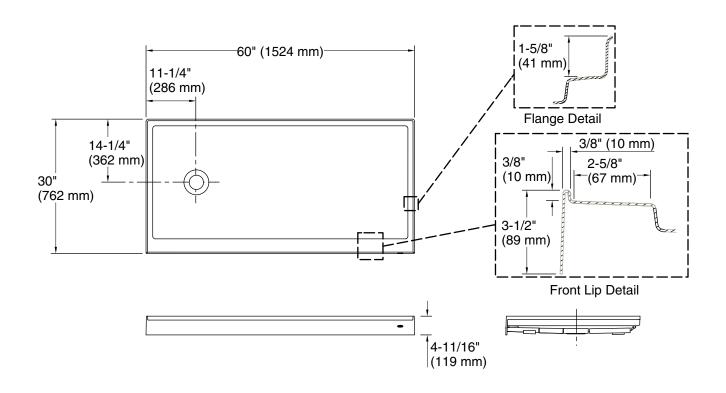

## **Technical Information**

All product dimensions are nominal.

Drain location: Left

Weight: 59 lbs (26.8 kg)
Minimum flat for 2-5/8" (67 mm)

door:

#### **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

Subfloor must be within 1/2" (13 mm) of level. This receptor has a front lip. This should be taken into account when installing a shower door.

