

Features

- Comfort Depth® design offers a convenient and low step-over height while retaining the depth of a standard 21" bath
- Integral lumbar support on both ends
- Slotted overflow allows for deep soaking
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Coordinates with other products in the Rêve collection

Material

- KOHLER® enameled cast iron
- Painted exterior surface smoothness can vary from product to product

Installation

- Center drain
- Drop-in or undermount

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-137 Under-Mount Installation Kit K-1179 Vinyl Tiling-in Bead K-23726 Drain treatment K-23725 Cast iron cleaner



Codes/Standards

ASME A112.19.1/CSA B45.2 ASTM F462

KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description

0 White





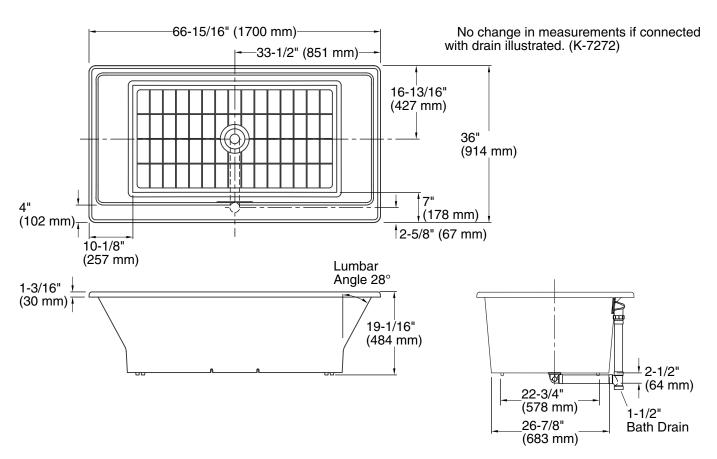

Technical Information

All product dimensions are nominal.

Drain location: Center

Basin area, bottom: 49" x 26-1/2" (1245 mm x 673 mm)

Basin area, top: 62-1/2" x 29-1/4" (1588 mm x 743 mm)

Weight: 435 lbs (197.3 kg)
Minimum floor load: 78 lbs/ft² (380.8 kg/m²)

Water depth: 15-1/4" (387 mm) Water capacity: 90 gal (340.7 L)

Cutout: Drop-in, 66-1/2" x 35-1/2" (1689 mm x

902 mm)

Template: K-137, required, not included

Minimum flat for 1" (25 mm)

door:

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

To clear the overflow side bath rim, a minimum 7" (178 mm) bath spout is recommended.

To clear the end wall bath rim, a minimum 10" (254 mm) bath spout is recommended.

