



**Archer®**

42" x 42" alcove shower base, center drain  
**K-9393**

### Features

- Low-threshold design for easy entry and exit
- Covered drain with removable cover
- Single threshold for alcove installation
- Coordinates with other products in the Archer collection

### Material

- Acrylic

### Installation

- Center drain

### Recommended Products/Accessories

K-9132 Shower Drain

K-23726 Drain treatment



### Codes/Standards

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

### KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description   |
|-------------------------------------------------------------------------------------|------|---------------|
|  | 0    | White         |
|  | 96   | Biscuit       |
|  | NY   | Dune          |
|  | 95   | Ice™ Grey     |
|  | 58   | Thunder™ Grey |
|  | 7    | Black Black™  |


1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

9-20-2025 15:21 - US/CA

THE BOLD LOOK  
OF **KOHLER®**

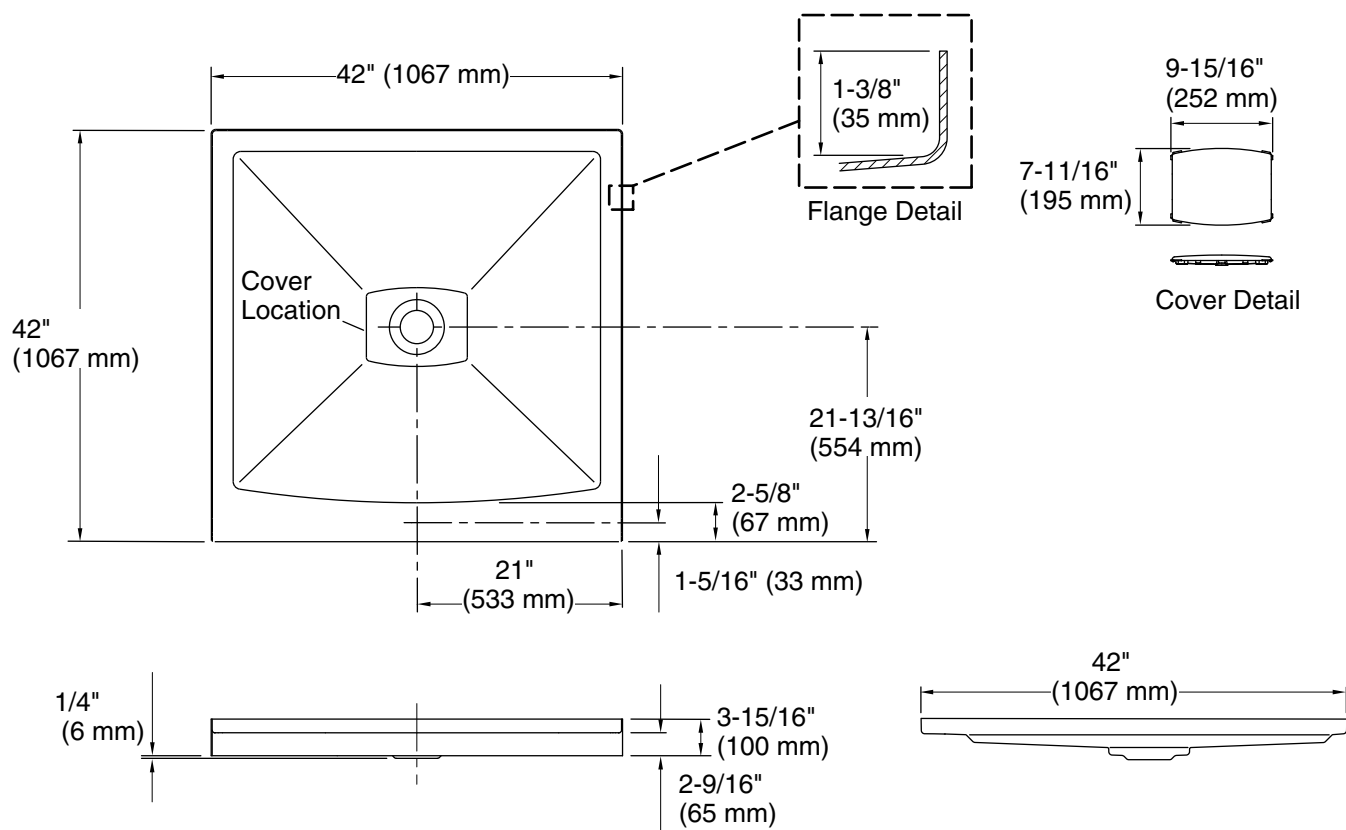

## Technical Information

All product dimensions are nominal.

|                        |                                                  |
|------------------------|--------------------------------------------------|
| Drain location:        | Center                                           |
| Weight:                | 44 lbs (20 kg)                                   |
| Minimum floor load:    | 20 lbs/ft <sup>2</sup> (97.6 kg/m <sup>2</sup> ) |
| Minimum flat for door: | 2-5/8" (66 mm)                                   |

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

Shimming may be required to level the fixture.

Shimming may be required between the stud frame and the fixture.

Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).