

Features

- Textured floor pattern.
- Single threshold for three-wall or alcove installation.
- Durable acrylic construction.
- Center rear drain.
- Coordinates with other products in the Memoirs collection.

Recommended Products/Accessories

K-9132 Shower Drain
K-702208-G54 Frameless Sliding Shower Door
K-702208-G73 Frameless Sliding Shower Door
K-702208-L Frameless Sliding Shower Door
K-702209-L Frameless Sliding Shower Door
K-705808-L Semi-Frameless Pivot Shower Door
K-705809-L Semi-Frameless Pivot Shower Door
K-705822-L Semi-Frameless Pivot Shower Door
K-705823-L Semi-Frameless Pivot Shower Door
K-706010-L Frameless Sliding Shower Door
K-706011-L Frameless Sliding Shower Door
K-706016-L Frameless Sliding Shower Door
K-706017-L Frameless Sliding Shower Door



Codes/Standards











ASME A112.19.1/CSA B45.2
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662


KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

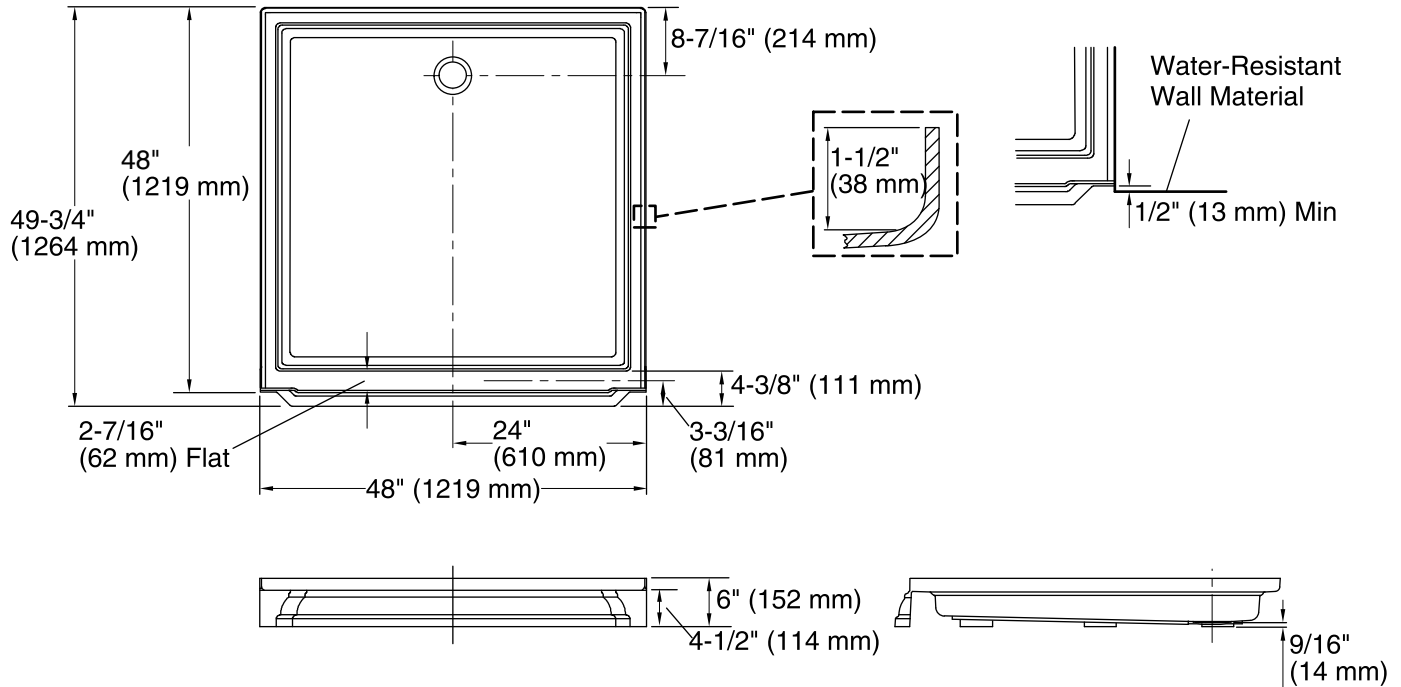

Technical Information

All product dimensions are nominal.
 Installation: Three-wall alcove
 Drain location: Center rear
 Weight: 55 lbs (24.9 kg)
 Minimum floor load: 20 lbs/ft² (97.6 kg/m²)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions. Shimming may be required to level the fixture. Shimming between stud frame and fixture may be required. Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).