## Single-handle bathroom sink faucet, 1.2 gpm

K-98146-4



### **Features**

- Single Lever handle allows for both volume and temperature control
- Inlcudes metal pop-up drain with 1-1/4" tailpiece
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Single control bathroom sink faucet with 6" optional escutcheon plate included
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)

### Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

## Installation

- For single-hole or 4" (102 mm) centerset installation (escutcheon plate included)
- Preattached flexible supply lines simplify installation

## **Recommended Products/Accessories**

K-23726 Drain treatment





## Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) **ADA** ICC/ANSI A117.1 CSA B651 OBC

## **KOHLER® Faucet Lifetime Limited** Warrantv

See website for detailed warranty information.

## Available Colors/Finishes


Color tiles intended for reference only.


Color Code Description

CP Polished Chrome



# Single-handle bathroom sink faucet, 1.2 gpm K-98146-4

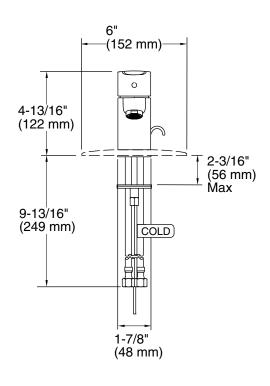

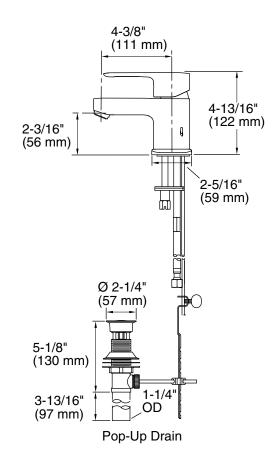

## **Technical Information**

All product dimensions are nominal.

Faucet flow rate: 1.2 gal/min (4.5 l/min)

Drain included: Yes
Drain tailpiece Yes

included:

Spout:

Spout reach: 4-3/8" (111 mm)

## **Notes**

Install this product according to the installation guide.

ADA compliant for handles only. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

