

Coralais® Kitchen Sink Faucet K-P15172-F

Features

- Metal construction.
- One-piece self-contained ceramic disc valve allows both volume and temperature control.
- Temperature memory allowing faucet to be turned on and off at any temperature setting.
- High-temperature limit stop.
- 8-1/2" (216mm) swing spout reach.
- Flexible supplies.
- Matching finish sidespray.
- Lever handle.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)]
- Project pack six per case.



ADA CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 ADA ICC/ANSI A117.1 CSA B651

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

CP Polished Chrome





Coralais® Kitchen Sink Faucet K-P15172-F

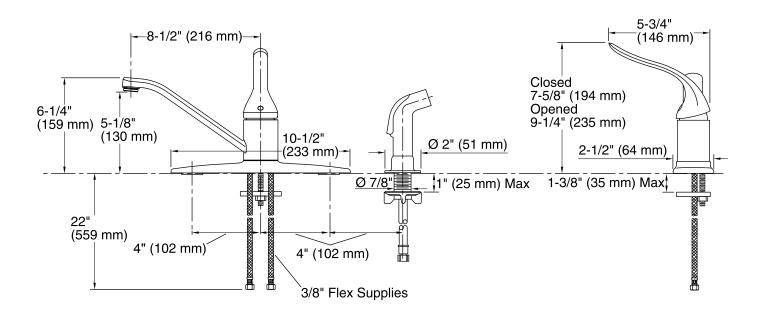

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Spout:

Spout reach: 8-1/2" (216 mm)

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

