### **Kallan®**

### **KOHLER** Faucets

# widespread bathroom sink faucet K-R24056-4D

#### **Features**

- Two-handle widespread faucet for 8" 16" (203 406 mm) centers
- Two lever handles offer separate control of hot and cold water
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 1.2 gpm (4.5 lpm) maximum flow rate
- Coordinates with other products in the Kallan™ collection

#### Material


- Premium material construction for durability and reliability
- Select KOHLER finishes feature ScratchShield® technology which withstands even the toughest daily use
- Spot Repel™ finish resists fingerprints, smudges, and water spots (Oil-Rubbed Bronze finish only)

#### Installation

- Widespread
- Simplified faucet installation; mounting hardware requires no special tools
- Includes clicker drain
- Handles preassembled on valves and quick-connect fittings simplify installation

#### **Recommended Products/Accessories**

K-23726 Drain treatment K-23723 Faucet cleaner





#### Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

Color Code Description


BN Vibrant® Brushed Nickel

2BZ Oil-Rubbed Bronze



### **Kallan®**

## widespread bathroom sink faucet K-R24056-4D

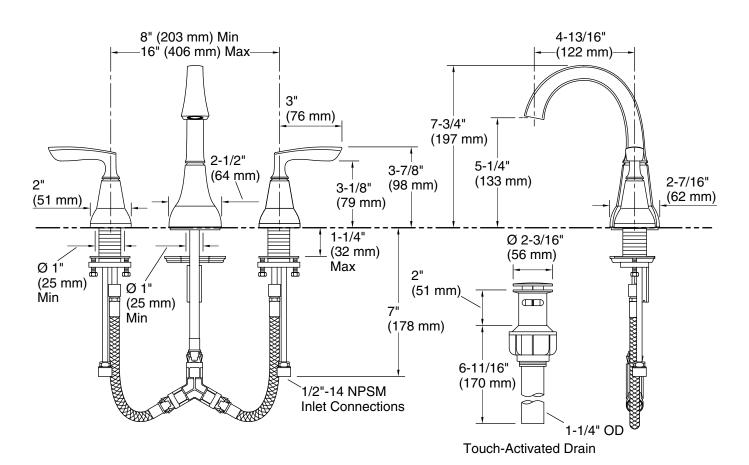

#### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Spout:

Spout reach: 4-13/16" (122 mm)

#### **Notes**

Install this product according to the installation instructions.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

