

Pull-out single-handle kitchen sink faucet w/ soap dispenser K-R27141-SD

∆vi™

Features

- Two-function pull-out sprayhead allows you to switch from aerated stream to Sweep® spray.
- Sweep® spray provides a wide, powerful blade of water that sweeps your dishes and sink clean.
- DockNetik® magnetic docking system securely locks sprayhead into place when not in use.
- ProMotion® technology's light, quiet braided hose and balljoint swivel make the pull-out sprayhead easier and more comfortable to use.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- High-arch spout offers vertical clearance for tall cookware and pitchers.
- Single lever handle makes adjusting water temperature easy.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).
- Box includes: Assembled faucet, supply lines, soap/lotion dispenser, and escutcheon plate.

Material

- Premium metal construction for durability and reliability.
- Select KOHLER finishes feature ScratchShield[®] technology which withstands even the toughest daily use.

Installation

- Installs with 1-, 2-, 3-, or 4- hole sink (escutcheon plate included).
- Flexible supply lines and quick-connect fittings simplify installation.
- Longer shank works with countertops up to 2½" inches thick and is easy to install.

Recommended Products/Accessories

K-23723 Faucet cleaner





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


CP VS BL 2MB



Avi™

KOHLER, Faucets

Pull-out single-handle kitchen sink faucet w/ soap dispenser K-R27141-SD

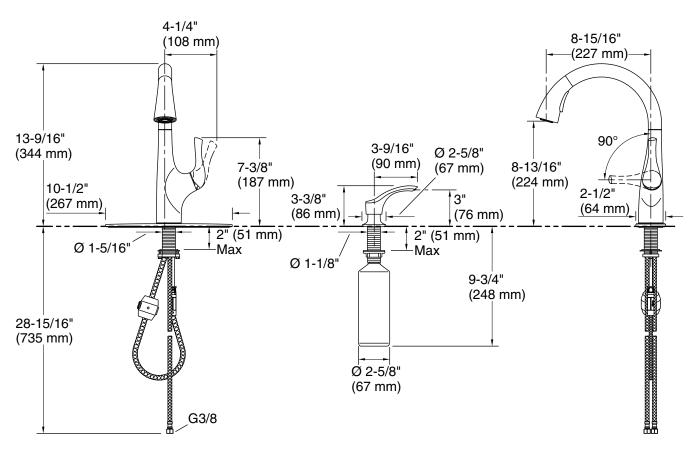

Technical Information All product dimensions are nominal. Notes

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

