

#### Features

- Includes face plate with handle, shower arm with flange and showerhead.
- Single lever handle controls both on/off activation and temperature setting.
- Coordinates with Fairfax faucets and accessories to complete your bathroom.
- Includes single function 2.5 gpm (9.5 l/min) showerhead.
- Showerhead features MasterClean<sup>™</sup> sprayface for easy cleaning.
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3 degrees Fahrenheit during water pressure fluctuations.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing, exceeding industry durability standards.

#### Installation

• Trim set requires valve to complete installation.

#### **Required Products/Accessories**

- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{B}}$  Valves or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp® Valves
- or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{R}}$  Valves or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{B}}$  Valves or
- K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{B}}$  Valves or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp® Valves



Rite-Temp® Shower Valve Trim

Fairfax®

K-TS12014-4



#### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

## KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description


CP	Polished Chrome
BN	Vibrant® Brushed Nickel

2BZ Oil-Rubbed Bronze



# KOHLER. Faucets

### Fairfax® Rite-Temp® Shower Valve Trim K-TS12014-4

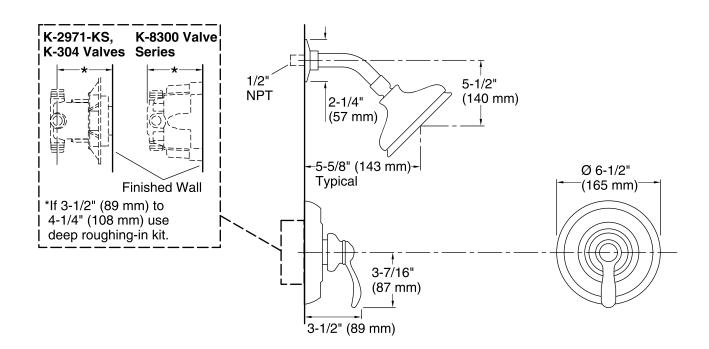

#### **Technical Information**

All product dimensions are nominal.

#### Showerhead/Body Spray:

Rated maximum flow:2.5 gal/min (9.5 l/min)Pressure:80 psi (5.5 bar)

#### Notes

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

