

built-in compact size luxury thermostatic valve

15TH0-CL.C.R

15/8"

C

Specifications:

Installation: built-in wall mount

Exterior Dimensions: D: Ø 4 1/2"

Material: solid brass unibody construction with

thermostatic cartridge

Water use: 10 GPM (43.5 PSI)
Finishes: CR - polished chrome

PN - polished nickel NI - brushed nickel BG - brushed gold 44 - matte black

Fittings included: Rough-in # VTH0-CL


and trim # 15THO-CL.C.R-A

Features:

- thermostatic valve
- round backplate
- lever handle
- 3/4" NPT water IN and OUT connections
- anti-scald protection & temperature regulation
- water temperature set to 100°F
- screwdriver service stops
- finished wall must be flush with mudguard as marked
- 1" extension kit available


Codes + Standards:

- Meets and exceeds applicable national codes and standards
- CAL-Green compliant



Recommended Items:

- Replacement parts:
 - VTH0-CL rough-in
 - 15TH0-CL.C.R-A trim
 - VTH0-CL-CT ceramic cartridge
 - VTH0-CL-EX 1" extension kit

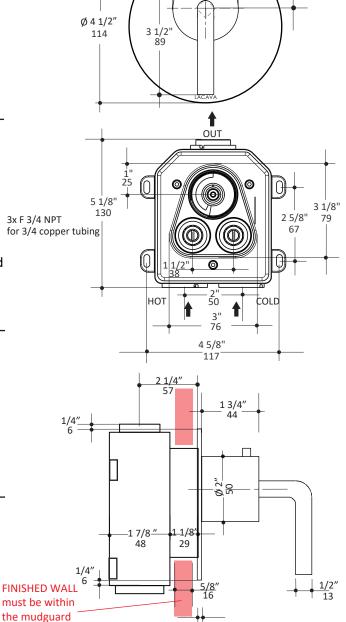

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.

Revised: 06/02/2020

limits