

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

MATRIX SILLCOCKS

T/S-211

Compact design is ideal for confined installations.

Garden hose outlet contains three complete hose threads, permitting a stable hose connection.

Slotted sill flange makes attachment to the sill quick and easy.

Full-pattern handwheel is angled toward the user, away from the sharp hose threads.

Wrench flats cast into the body, near the sill flange ease installation onto the pipe or tubing.

Working Pressure, Non Shock (PSI)

Cold working pressure (CWP): 125


Saturated steam (WSP): Not suitable for steam service

- End connections comply with :


ANSI / ASME B1.20.1 (FNPT)
and ASME B16.18 (CTS)

- Manufactured in an ISO accredited facility

Pictured Model S-211

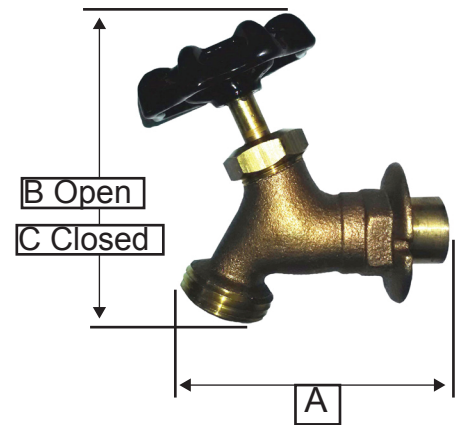

Pictured Model T-211

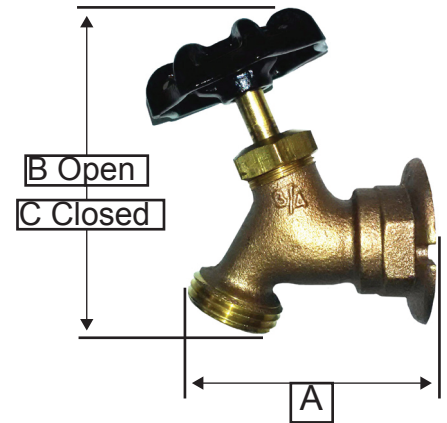

MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATION
1 Handle	Cast iron	ASTM A48 class 35
2 Handle nut	Brass	ASTM B16 C36000
3 Stem	Cast brass	ASTM B584 C85700
4 Stem packing	NBR (Buna-N) rubber	Commercial grade
5 Bonnet	Forged brass	ASTM B16 C36000
6 Body	Cast brass	ASTM B584 C85700
7 Seat washer	NBR (Buna-N) rubber	Commercial grade
8 Seat retaining screw	Brass	ASTM B16 C36000

DIMENSIONS

Size	A	B	C
1/2" FNPT x 3/4" MGHT	2.48	3.41	3.21
3/4" FNPT x 3/4" MGHT	2.54	3.48	3.21
3/4" / 1/2" swt. x 3/4" MGHT	3.00	3.56	3.32