



## B039

TIFFANY

### DETAILS

Smooth Brass, Smooth Stainless Steel  
Installation Type: Drop-In or Undermount

Uses Standard 1.5" Drain  
No Overflow

### AVAILABLE FINISHES

<b>SS</b>	Satin Stainless Steel
<b>PS</b>	Polished Stainless Steel
<b>PB</b>	Polished Unlacquered Brass
<b>UB</b>	Satin Unlacquered Brass

### AVAILABLE DRAINS

<b>D004</b>	Grid Strainer
<b>D005</b>	Lift and Turn
<b>D006</b>	Pop-up w/ lift rod
<b>D011 – D017</b>	Decorative Grid Strainers
<b>D101-D720</b>	Decorative Drains

### INSTALLATION


Drain should be installed first.  
**DROP-IN:** Cut opening large enough for the sink to be "dropped in" to countertop.  
**UNDERMOUNT:** Cuts in countertop are up to the discretion of the installer. Clips or other installation method must be provided by the fabricator/installer.  
 Use 100% silicone to adhere sink to countertop. Clean any excess silicone from sink surface.

### CARE

Clean with mild soap. No abrasive chemicals

### WARRANTY

Linkasink warranties our product to be free from manufacturing defect for the life of the product. Warranty does not cover abuse.

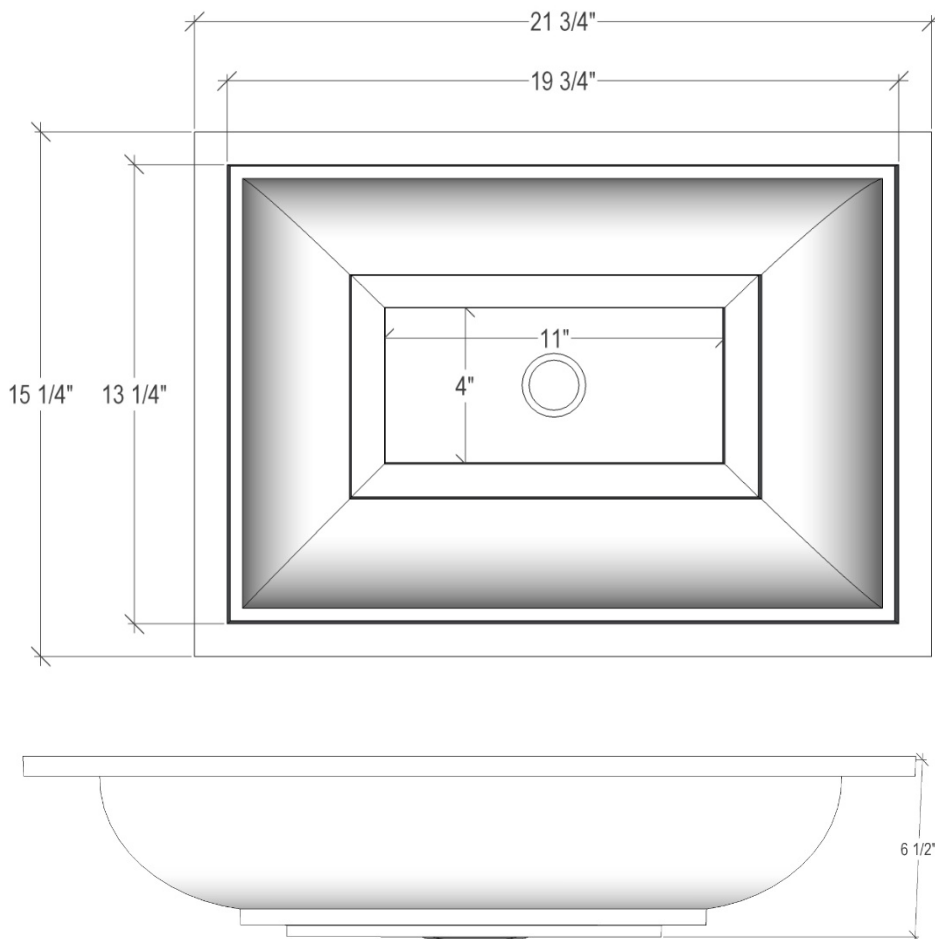

### DIMENSIONS WILL VARY

**DO NOT** use this sheet as a guide for countertop cuts. Due to the handmade nature of each product, templates are not provided.