

Hydronic Expansion Tanks, Floor

Product Specifications



MAINLINE

PRODUCT FEATURES

- For use in Closed, Non-Potable, Hydronic Heating Systems
- SX Series (Non-ASME) 100 PSIG Working Pressure
- Stainless Steel Connection
- Heavy Duty Butyl Diaphragm
- Polypropylene Tank Liner
- Projection Welded Air Valve



✓ To Submit	Part No.	Description	Size
	MLSX30V	Floor Hydronic Expansion Tank, 1 Year Warranty	10.3 gallon
	MLSX40V	Floor Hydronic Expansion Tank, 1 Year Warranty	14.0 gallon
	MLSC60V	Floor Hydronic Expansion Tank, 1 Year Warranty	20.0 gallon

Warranty: See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



Contact your sales representative for more information or visit our website at mainlinecollection.com

Hydronic Expansion Tanks, Floor

Product Specifications



MAINLINE

Part	Tank Volume		Acceptance Volume		A Height		B Diameter		C Conn Inset		D Conn Centerline		Sys Conn. (NPTF)	Ship Wt.	
	Liters	Gallons	Liters	Gallons	Mm	Ins	Mm	Ins	Mm	Ins	Mm	Ins		Kg	Lbs
	MLSX30V	53	14	43	11.3	635	25	390	15	132	5-3/16	46		1-13/16	1
MLSX40V	76	20	43	11.3	838	33	390	15	132	5-3/16	46	1-13/16	1	15.0	33
MLSX60V	121	32	43	11.3	1219	48	390	15	132	5-3/16	46	1-13/16	1	20.0	43



All dimensions and weights are approximate

SPECIFICATIONS

Description	Shell	Diaphragm	Factory Precharge
Standard Construction	Steel	Heavy Duty Butyl/EPDM	12 PSIG (.82 bar)

MAX OPERATING CONDITIONS

Operating Temperature	Working Pressure
240°F (115°C)	100 PSIG (6.9 bar)

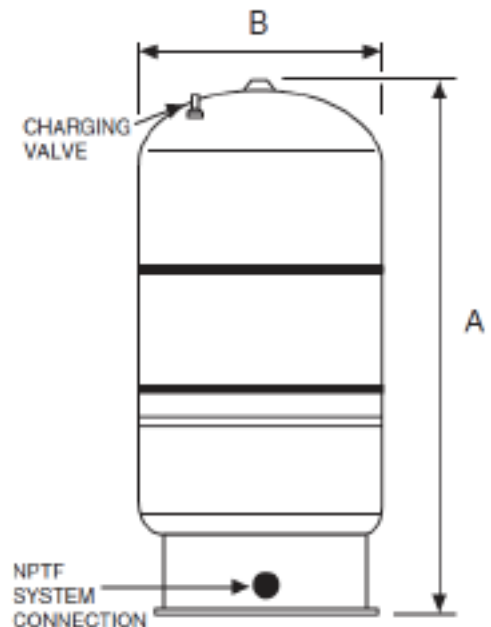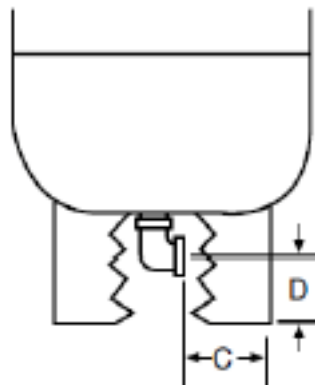

Complies with Low Lead Plumbing Law

Warranty: See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



Contact your sales representative for more information or visit our website at mainlinecollection.com

Revised 4-2016