

# Well Tanks, Floor - Tan

## Product Specifications



**MAINLINE®**

### PRODUCT FEATURES

- Stainless Steel Connection
- Heavy Duty Butyl Diaphragm
- Polypropylene Tank Liner
- Projection Welded Air Valve
- Water Inlet Agitator
- 5 Year Warranty



✓ To Submit	Part No.	Description	Size
	MLWF14-T	Floor Well Tank, Tan	14.0 gallon
	MLWF20-T	Floor Well Tank, Tan	20.0 gallon
	MLWF26-T	Floor Well Tank, Tan	26.0 gallon
	MLWF32-T	Floor Well Tank, Tan	32.0 gallon
	MLWF34-T	Floor Well Tank, Tan	34.0 gallon
	MLWF44-T	Floor Well Tank, Tan	44.0 gallon
	MLWF62-T	Floor Well Tank, Tan	62.0 gallon
	MLWF81-T	Floor Well Tank, Tan	81.0 gallon
	MLWF86-T	Short Floor Well Tank, Tan	86.0 gallon
	MLWF119-T	Floor Well Tank, Tan	119.0 gallon

**Warranty:** See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



**Contact your sales representative for more information or visit our website at [mainlinecollection.com](http://mainlinecollection.com)**

# Well Tanks, Floor - Tan

## Product Specifications




Part	Lit	Gal	Max Accept Factor	A Height		B Diameter		C Conn.	Sys Conn. (NPTF)	Factory Pre-charge	Working Pressure	Ship Wt.	
				Mm	Ins	Mm	Ins	Ins	Ins	PSIG	PSIG	Kg	Lbs
MLWF14-T	53	14.0	0.81	635	25	381	15	1-19/32	1	38	125	10.0	22
MLWF20-T	76	20.0	0.57	813	32	381	15	1-19/32	1	38	125	12.7	28
MLWF26-T	98	26.0	0.44	991	39	381	15	1-19/32	1	38	125	15.4	34
MLWF32-T	121	32.0	0.35	1194	47	381	15	1-19/32	1	38	125	18.1	40
MLWF34-T	129	34.0	1.00	762	30	559	22	1-15/16	1-1/4	38	125	22.7	50
MLWF44-T	167	44.0	0.77	914	36	559	22	1-15/16	1-1/4	38	125	25.9	57
MLWF62-T	235	62.0	0.55	1194	47	559	22	1-15/16	1-1/4	38	125	34.0	75
MLWF81-T	301	81.0	0.41	1448	57	559	22	1-15/16	1-1/4	38	125	41.7	92
MLWF86-T	326	86.0	0.54	1194	47	660	26	2-1/16	1-1/4	38	125	44.9	99
MLWF119-T	450	119.0	0.39	1575	62	660	26	2-1/16	1-1/4	38	125	60.3	133

All dimensions and weights are approximate

### SPECIFICATIONS

Description	Shell	Diaphragm	Liner	Coating
Diaphragm Construction	Deep Drawn Steel	Heavy Duty Butyl	Polypropylene	2-Part Urethane

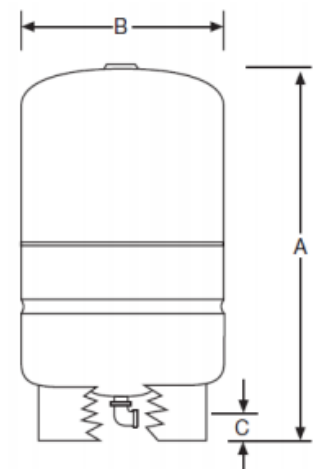

### MAX OPERATING CONDITIONS

Operating Temperature	Working Pressure
200°F (93°C)	125 PSIG (861.8kPa)

Complies with Low Lead Plumbing Law



**Warranty:** See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

Contact your sales representative for more information or visit our website at [mainlinecollection.com](http://mainlinecollection.com)