


Domestic Brass Nipples

Specification Sheet

FEATURES & BENEFITS

- Lead Free Red Brass
- NSF Approved
- Pipe Meets ASTM B43 & ASTM B687
- ANSI/ASME B1.20.1 Threads
- Stocked From 1/8" Through 4" Diameters

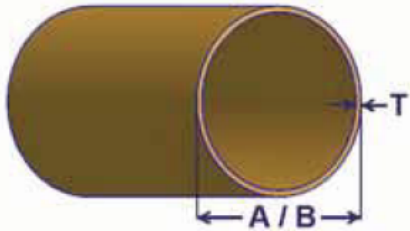

RED BRASS PIPE

Weights & Dimensions ASTM B43 Tolerances Apply

A nominal pipe size	B actual outside diameter	T actual wall thickness Standard	Pounds per Foot Standard	T actual wall thickness Extra Strong	Pounds per Foot Extra Strong
1/8	0.405	0.062	0.2533	0.100	0.363
1/4	0.540	0.082	0.4474	0.123	0.611
3/8	0.675	0.090	0.6272	0.127	0.829
1/2	0.840	0.107	0.9344	0.149	1.23
3/4	1.050	0.114	1.2712	0.157	1.67
1	1.315	0.126	1.7848	0.182	2.46
1 1/4	1.660	0.146	2.6333	0.194	3.39
1 1/2	1.900	0.150	3.1273	0.203	4.10
2	2.375	0.156	4.1234	0.221	5.67
2 1/2	2.875	0.187	5.9900	0.280	8.66
3	3.500	0.219	8.5600	0.304	11.6
4	4.500	0.250	12.700	0.341	16.9
5	5.562	0.250	15.8	0.375	23.2
6	6.625	0.250	19.0	0.437	32.2



Domestic Brass Nipples

Specification Sheet

FEATURES & BENEFITS

- Lead Free Red Brass
- NSF Approved
- Pipe Meets ASTM B43 & ASTM B687
- ANSI/ASME B1.20.1 Threads
- Stocked From 1/8" Through 4" Diameters



BRASS NIPPLE — WEIGHT CHART

Approximate shipping weight in pounds per 100 pieces, Standard Red Brass and Copper
For extra heavy brass nipples, multiply the below weight by 1.4

Dimension	Length of Close	Close	1-1/2	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	7	8	9	10	11	12
1/8	3/4	1	3	4	5	6	7	8	9	10	12	13	15	17	19	21	24	26
1/4	7/8	2	5	7	9	11	13	14	14	16	18	20	22	26	33	37	41	44
3/8	1	4	6	9	12	14	16	19	21	24	27	29	34	39	44	48	53	58
1/2	1-1/8	6	8	12	15	18	22	26	30	33	36	39	46	53	61	68	75	82
3/4	1-3/8	10	12	15	20	25	30	35	40	45	50	56	66	76	86	95	105	115
1	1-1/2	15		21	28	36	43	52	58	65	71	77	91	105	118	132	146	160
1-1/4	1-5/8	23		30	41	52	59	66	75	84	94	105	125	146	166	187	207	227
1-1/2	1-3/4	32		38	48	60	70	83	94	105	118	131	155	180	204	228	252	277
2	2	50			75	90	103	118	134	150	165	180	212	244	276	308	340	372
2-1/2	2-1/2	90				115	140	165	190	215	240	260	310	360	410	460	510	560
3	2-5/8	135				170	205	240	280	315	350	385	455	525	595	665	735	805
3-1/2		200						330	390	425	455	490	580	670	760	850	935	1025
4	2-7/8	230						360	410	455	505	550	645	740	835	930	1025	1120

