

Press Adapter Fittings

Specification Sheet

FEATURES & BENEFITS

- Lead Free Brass
- 200 PSI
- Temp. Range: 0°F - 200°F
- Temp. Range: 32°F - 200°F (Drop Ear)
- Leak Prior to Press
- cUPC, NSF61 & NSF372 Approved
- Sizes 1/2" - 2"




DIMENSIONS

Part #	Size	D	A	L	L1	L2	L3
PMA0303LF	1/2" Press x 1/2" MIP	0.63	1/2"	1.81	0.43	1.10	0.59
PMA0404LF	3/4" Press x 3/4" MIP	0.89	3/4"	1.97	0.43	1.18	0.61
PMA0505LF	1" Press x 1" MIP	1.13	1"	2.13	0.43	1.18	0.73
PMA0606LF	1-1/4" Press x 1-1/4" MIP	1.39	1-1/4"	2.29	0.43	1.18	0.79
PMA0707LF	1-1/2" Press x 1-1/2" MIP	1.64	1-1/2"	2.64	0.51	1.38	0.77
PMA0808LF	2" Press x 2" MIP	2.14	2"	2.88	0.63	1.58	0.79
PFA0303LF	1/2" Press x 1/2" FPT	0.63	1/2"	1.77	0.43	1.10	0.59
PFA0404LF	3/4" Press x 3/4" FPT	0.89	3/4"	1.85	0.43	1.18	0.59
PFA0505LF	1" Press x 1" FPT	1.13	1"	1.97	0.43	1.18	0.71
PFA0606LF	1-1/4" Press x 1-1/4" FPT	1.39	1-1/4"	2.03	0.43	1.18	0.75
PFA0707LF	1-1/2" Press x 1-1/2" FPT	1.64	1-1/2"	2.23	0.51	1.38	0.75
PFA0808LF	2" Press x 2" FPT	2.14	2"	2.48	0.63	1.58	0.79

Part #	Size	DN	L1	L2	L3	H	A
PDE-0303LF	1/2" Press Drop Ear Elbow	0.57	1.10	0.59	1.77	1.77	1/2-14NPT
PDE-0404LF	3/4" Press Drop Ear Elbow	0.79	1.18	0.61	1.97	1.95	1/2-14NPT


MATERIAL SPECIFICATIONS

No.	Part	Material
1	Pipe Fitting	Brass C46500
2	O-Ring	EPDM

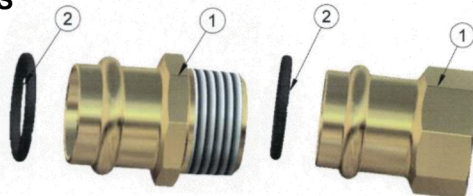


PMA

PFA



PDE

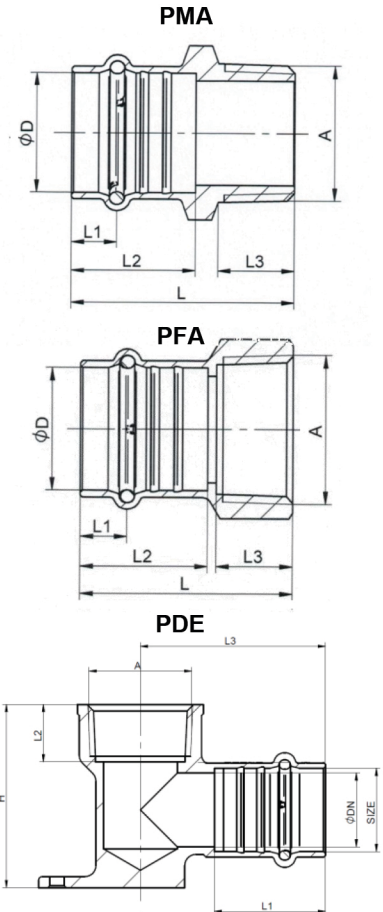

MATCO
NORCA