

# **Specifications**

#### **FAUCET DESCRIPTION**

- Chrome plated brass and metal construction
- Pressure balancing valve design with integral check stops
- 1/2" CC connections
- · Supplied with vandal resistant screws

#### **OPERATION**

- Lever style handle with temperature indicator on the escutcheon
- Pull-on/push-off operation
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to limit the handle travel in the HOT direction
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm\,2^\circ$

#### CARTRIDGE


- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- · Accommodates back to back installations

#### **STANDARDS**

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including ASSE 1016
- ADA ( for lever handle

### **WARRANTY**


· Warranted for 5 years against material or manufacturing defects



Single-Handle Pressure Balancing Tub/Shower Valve with Temperature Limit Stop

**Model:** 8350



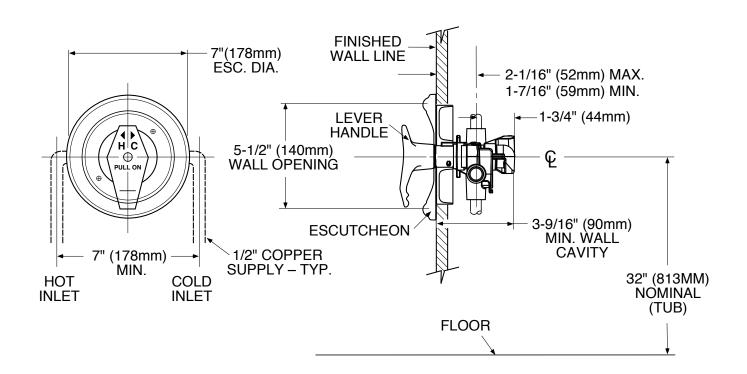

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)