

DA 2390

Insert ventilation hood  
with energy-efficient LED lighting and backlit controls for easy use.



- Customized kitchen design - fully integrated in 34 7/8 (884)Inch width
- Space saving – suitable for narrow wall units from 11.8" deep
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean - Miele CleanCover

EAN: 4002515939932 / material number: 10743660


<b>Construction type</b>	
Insert ventilation hood	•
<b>Design</b>	
Color	No colour
RAL color possible as special order	•
Customization possible on request	•
<b>Operating modes</b>	
Recirculated mode	Convertible
OdorFree charcoal filter (order separately)	DKF19-900
<b>Control panel</b>	
Electronic controls	•
Light-touch controls	•
Power levels (number excl. Intensive)	3
Intensive setting	•
<b>Cleaning convenience</b>	
Easy-to-clean CleanCover hood liner	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters	2
<b>Lighting</b>	
LED ClearView lighting	•
Light intensity in Lx	500
Color temperature in K	3,000
<b>Blower</b>	
Dual-action blower	•
AC motor	•
<b>Air throughput with max. duct diameter in vented mode (not for external version)</b>	
Air throughput	Values upon request
<b>Safety</b>	
Safety shut-off	•
<b>Technical data</b>	
Canopy width in in.(mm)	34 7/8 (884)
Height of hood canopy in in.(mm)	2 1/2 (63)
Depth of hood canopy in in.(mm)	11 3/4 (297)
Minimum distance above electric cooktops in in.(mm)	24 1/8 (610)
Minimum height above gas cooktop (max. 12.6 kW total power, burner 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	29 (13.0)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15
Number of phases	1
<b>Installation notes</b>	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
<b>Standard accessories</b>	
Non-return flap	•
Reducer from 150 to 125 mm Ø	•

More information at [www.MieleUSA.com](http://www.MieleUSA.com)

For further information please see next page...

DA 2390

Insert ventilation hood  
with energy-efficient LED lighting and backlit controls for easy use.

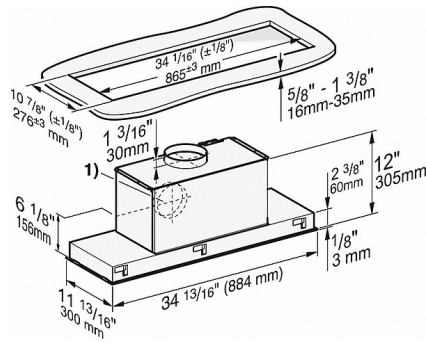

DA 2390 (Installation drawing) - US

1) Vent connection alternatively to rear