

DA 6698 W Puristic Edition 6000

Wall ventilation hood  
with energy-efficient LED lighting and touch controls for simple operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Energy-efficient and quiet
- Pleasantly quiet – Miele Silence package

EAN: 4002516024637 / material number: 10877030

<b>Construction type</b>	
Wall ventilation hood	•
<b>Design</b>	
Color	Brilliant white
RAL color possible as special order	•
Customization possible on request	•
<b>Operating modes</b>	
Recirculated mode	Convertible
OdorFree charcoal filter (order separately)	DKF12-1
<b>Control panel</b>	
Electronic controls	•
Touch controls on glass	•
Power levels (number excl. Intensive)	3
Intensive setting	•
Programmable 'Intensive' switch-off	•
Delayed shutdown for 5 or 15 minutes	•
Programmable grease filter saturation indicator	•
Programmable charcoal filter saturation indicator	•
Acoustic package	•
<b>Cleaning convenience</b>	
Easy-to-clean CleanCover hood liner	•
<b>Networking of domestic appliances</b>	
Miele@home	•
WiFiConn@ct	•
ShopConn@ct	•
Automatic function Con@ctivity 2.0 (Zigbee)	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters	3
<b>Lighting</b>	
LED ClearView lighting	•
Light intensity in Lx	670
Color temperature in K	3,500
Light dimmer function	•
<b>Blower</b>	
Dual-action blower	•
AC motor	•
<b>Safety</b>	
Safety shut-off	•
Single-ply safety glass (ESG)	•

DA 6698 W Puristic Edition 6000

Wall ventilation hood

with energy-efficient LED lighting and touch controls for simple operation.




<b>Technical data</b>	
Overall hood height for vented and external in in.(mm)	28 (710)
Overall hood height for recirculation in in.(mm)	33 1/8 (840)
Canopy width in in.(mm)	35 3/8 (898)
Height of hood canopy in in.(mm)	3 3/8 (85)
Depth of hood canopy in in.(mm)	19 3/4 (500)
Minimum distance above electric cooktops in in.(mm)	24 1/8 (610)
Minimum height above gas cooktop (max. 12.6 kW total power, burner 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	58 (26.0)
Length of electrical wire in ft (m)	2 (0.9)
Standard plug fitted	•
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15
Number of phases	1
<b>Installation notes</b>	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
Telescopic wall bracket	•
<b>Standard accessories</b>	
Non-return flap	•
Reducer from 150 to 125 mm Ø	•
Wireless stick Con@ctivity 2.0 for KM	XKS 3000 Z

DA 6698 W Puristic Edition 6000

Wall ventilation hood

with energy-efficient LED lighting and touch controls for simple operation.

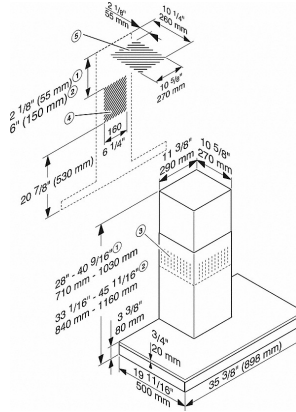

DA 6698 W, CLST (Installation drawing) - USA

1. Extraction
2. Recirculation
3. Ventilation grilles at the top for recirculation
4. + 5. Vent cut-out positions (Area 5 not required for recirculation)