


DAS 4940

Built-in ventilation hood

for installation in narrow upper cabinets with EasySwitch controls

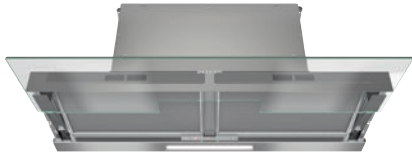

- Perfect combination with Con@ctivity-enabled cooktops
- Light design – transparent glass panel, 36 in (90 cm) wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Recirculation mode – Active AirClean or Longlife AirClean filter


EAN: 4002516496335 / Material number: 11878570 / Old Material Number: 28S4940TUSA

Construction type	
Built-in ventilation hood	•
Operating modes	
Recirculated mode	Convertible
Recirculation conversion kit (order separately)	DUU 151
OdorFree charcoal filter (order separately)	DKF 31-P, DKF 31-R
Design	
Color	Transp. glass
Control panel	
Miele@home	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Electronic controls	•
Touch controls on glass	•
Programmable Intensive switch-off	•
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Programmable grease filter saturation indicator	•
Programmable charcoal filter saturation indicator	•
Cleaning convenience	
Easy to clean canopy interior CleanCover	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	2
Lighting	
LED	•
Number x W	1 x 3 W
Light intensity in Lx	285 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
AC motor	•
Safety	
Safety shut-off	•
Single-ply safety glass (ESG)	•
Technical data	
Canopy width in in.(mm)	34 (861)
Canopy height in in.(mm)	2 3/4 (68)
Canopy depth in in.(mm)	12 1/8 (307)
Minimum height above electric hobs in mm	24 1/8 (610)
Net weight in lbs. (kg)	38 (17.0)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60
Installation notes	
Vent connection at top	•
Vent connection at top and rear	•

DAS 4940

Built-in ventilation hood

for installation in narrow upper cabinets with EasySwitch controls

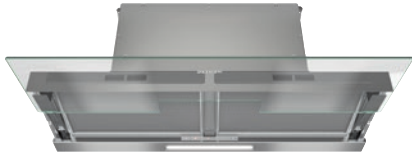

EAN: 4002516496335 / Material number: 11878570 / Old Material Number: 28S4940TUSA

Installation template

•

Accessories supplied

Non-return flap

•

Optional accessories



OdorFree charcoal filter

Nein

DAS 4940



Built-in ventilation hood

for installation in narrow upper cabinets with EasySwitch controls



DAS4940, Installation drawings

1) Extraction, recirculation with conversion kit DUU 150.,
 2) Alternative ducting connection to the rear., 3) Accessory DSM module., 4) The wall unit can be fitted with a partition after installation. The slots for the grease filters and, in recirculation mode, for the odor filters must remain accessible., The height of the wall unit and the cut-out dimensions must take into account any accessories fitted (e.g. silencer, recirculation hood conversion kit, DSM module)



DAS4940, drawing – US

1) Exhaust air, recirculation with DUU 150 conversion kit.,
 2) Exhaust air connection alternatively to the rear., 3) DSM module accessory., 4) The wall unit can be fitted with a partition after installation. The slots for the grease filters and, in the case of recirculation mode, for the odor filters must remain accessible., Mounted accessories must be taken into account for the cabinet height and cut-out dimensions (e.g. silencer, recirculation air conversion kit, DSM module).