## 117-3173RH **ALTO® 1.28**

### **MANSFIELD®**

Round Front, SmartHeight™, Vitreous China, Two-Piece Toilet

### **FEATURES**

- · 3-bolt SmartFasten™ tank-to-bowl connection
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Uses 20% less water than conventional toilets
- Round front SmartHeight<sup>™</sup> bowl
- 3-2" hybrid flapper flush valve
- Fluidmaster® anti-siphon pilot fill valve
- 12' rough-in
- · Model 31RH color-match, plastic trip lever
- · 2' glazed trapway
- · The Mansfield® Limited Lifetime Warranty
- · Available in White



#### COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
117-3173RH	Round front, SmartHeight™ two-piece toilet.			
117	Round front, SmartHeight™ toilet bowl only. Less toilet seat. Specify color.	UPC WESTER EL		
3173RH	Tank and cover only with right hand, front-mount, color-match, plastic trip lever. Fluidmaster® anti-siphon pilot fill valve. Less supply.	HIGH EFFICIENCY TOLLET  HIGH EFFICIENCY  WHITE STATES  ADA COMPLIANT		
TANK TRIM & REPLACEMENT PARTS				
31RH	Trip lever – color-match, plastic trip lever, right hand			
228	3-2" Hybrid flapper flush valve			
400A	Fluidmaster® anti-siphon pilot fill valve			
2206	Anti-siphon pilot fill valve (compatible replacement)			
630-0207	3" Replacement flapper kit			
160-LID	Tank lid			

When properly installed, this product meets the requirements for the Americans with Disabilities Act of 1990 (ADA). Refer to local plumbing codes, as they may vary by location and application.



# 117-3173RH **ALTO® 1.28**

### **MANSFIELD®**

Round Front, SmartHeight™, Vitreous China, Two-Piece Toilet

#### **SPECIFICATIONS**

MODEL #	DESCRIPTION	CODES/STANDARDS
117-3173RH	Round front SmartHeight™ (1.28 gpf / 4.8 lpf) two-piece toilet	HIGH EFFICIENCY TOULET  ADA COMPLIANT


MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3-2" Hybrid flapper flush valve
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	8'X9'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2-7/8'
SHIPPING WEIGHT	Model 117 - 49 lbs. (22 kg) Model 3173RH - 34 lbs. (15 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

### TANK OPTIONS

# TECHNICAL INFORMATION Note: these dimensions are nominal and subject to change without notice.

TANK UPITUNS				
3173	Standard 1.28 gpf configuration: 3-2" hybrid flapper flush valve, Fluidmaster® anti-siphon pilot fill valve, left hand, color- match trip lever.			
3173RH	Variation of model 3173, with right hand, color-match trip lever.			
3165	Variation of model 3173, with cover lock.			
3174	Variation of model 3173, with tank liner.			
3120	Variation of model 3173, with left hand, chrome trip lever.			
3125	Variation of model 3173, 14" rough-in.			

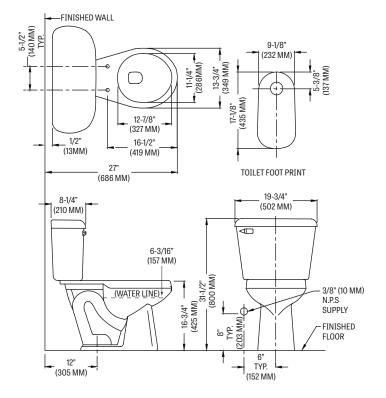

 $Fixture\ performance\ and\ specifications\ meet\ or\ exceed\ ASME\ A112.19.2/CSA\ B45.1\ standards, and\ other\ state\ and\ local\ codes.$ 

