137-3174 **ALTO® 1.28**

MANSFIELD®

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

FEATURES

- 3-bolt SmartFasten[™] tank-to-bowl connection
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Uses 20% less water than conventional toilets
- Elongated front SmartHeight[™] bowl
- 3-2" hybrid flapper flush valve
- Fluidmaster® anti-siphon pilot fill valve
- 12' rough-in
- · Lined tank for reduced condensation
- Model 31 color-match, plastic trip lever
- · 2' glazed trapway
- The Mansfield® Limited Lifetime Warranty
- · Available in White



COMPONENTS

| MODEL # | DESCRIPTION | CODES/STANDARDS | |
|-------------------------------|--|-------------------------------|--|
| 137-3174 | Elongated front, SmartHeight™ two-piece toilet. | | |
| 137 | Elongated front, SmartHeight™ toilet bowl only. Less toilet seat. Specify color. | D UPO L | |
| 3174 | Tank and cover only with left hand, front-mount, color-match, plastic trip lever. Fluidmaster® anti-siphon pilot fill valve and tank liner. Less supply. | HIGH EFFICIENCY TOLLET TOLET | |
| TANK TRIM & REPLACEMENT PARTS | | | |
| 31 | Trip lever - color-match, plastic trip lever, left hand | | |
| 228 | 3-2" Hybrid flapper flush valve | | |
| 400A | Fluidmaster® anti-siphon pilot fill valve | | |
| 2206 | Anti-siphon pilot fill valve (compatible replacement) | | |
| 630-0207 | 3" Replacement flapper kit | | |
| 160-LID | Tank lid | | |



137-3174

ALTO® 1.28

MANSFIELD®

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

SPECIFICATIONS

| MODEL # | DESCRIPTION | CODES/STANDARDS |
|----------|---|---------------------------------------|
| 137-3174 | Elongated front, SmartHeight™ (1.28 gpf / 4.8 lpf) two-piece toilet | HIGH EFFICIENCY TOULET ADA COMPLIANT |

| MATERIAL | Vitreous China | |
|----------------------|---------------------------------|--|
| WATER PRESSURE RANGE | 20 to 80 PSI | |
| FLUSH SYSTEM | 3-2" Hybrid flapper flush valve | |
| WATER USAGE | 1.28 gpf / 4.8 lpf | |
| WATER SURFACE AREA | 9' X 10' | |
| ROUGH-IN | 12' | |
| MAP RATING | 800 grams | |


| TRAP DIAMETER | 2' |
|-----------------|---|
| TRAP SEAL | 2-5/8' |
| SHIPPING WEIGHT | Model 137 - 56 lbs. (24 kg) Model 3174 - 34 lbs. (15 kg) |
| WARRANTY | Vitreous China - Limited Lifetime Tank Trim - Limited One Year |

TANK OPTIONS

Standard 1.28 gpf configuration: 3-2" hybrid flapper flush valve, Fluidmaster® 3173 anti-siphon pilot fill valve, left hand, colormatch trip lever. Variation of model 3173, with right hand, 3173RH color-match trip lever. 3165 Variation of model 3173, with cover lock. 3174 Variation of model 3173, with tank liner. Variation of model 3173, with left hand, 3120 chrome trip lever. 3125 Variation of model 3173, 14" rough-in.

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

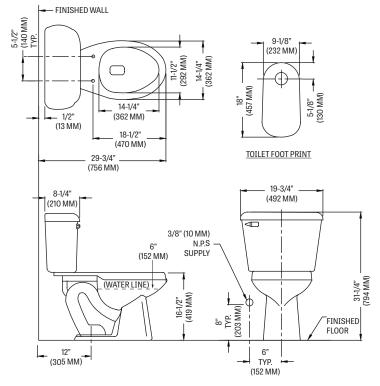

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

