149-153 **QUANTUM ONE**™

MANSFIELD®

Elongated Front, Pressure-Assist, Rear Outlet, Floor-Mount, Vitreous China, Two-Piece Toilet

FEATURES

- High performance pressure-assist, high efficiency toilet (HET)
- Flushmate IV[™] flushing technology
- 1.0 gpf / 3.8 lpf ultra-low water consumption
- Saves almost 40% more water than conventional
 1.6 gpf flushing systems
- · Elongated front, floor-mount, rear outlet bowl
- · Model 45 chrome-plated, metal trip lever
- 1-7/8' glazed trapway
- The Mansfield® limited lifetime warranty on china, Flushmate ten-year limited warranty on vessel
- · Available in White, Biscuit and Bone



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
149-153	Elongated front, floor-mount, rear outlet, pressure-assist, two-piece toilet. Includes tank trim. Less toilet seat and supply. Specify color.			
149	Elongated front, rear outlet, floor-mount, pressure-assist bowl only. Less toilet seat and supply. Specify color.			
153	Pressure-assist tank and cover only with left hand chrome-plated, metal trip lever. Less supply. Specify color.	Web Automotion Map of the contract of the cont		
TANK OPTIONS HIGH EFFICIENCY TOLLET TOLLET				
153RH	Pressure-assist tank and cover only with right hand chrome-plated, metal trip lever. Less supply. Specify color.			
154	Pressure-assist tank and cover only with chrome-plated, plastic push button actuator. Less supply. Specify color.			
TANK TRIM & RE	TANK TRIM & REPLACEMENT PARTS			
45	Trip lever - chrome-plated, metal trip lever, left hand			
125-LID	Tank lid			
FLUSHMATE® 504	Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460.			



149-153 **QUANTUM ONE**™

MANSFIELD®

Elongated Front, Pressure-Assist, Rear Outlet, Floor-Mount, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
149-153	Elongated front, rear outlet, floor-mount (1.0 gpf / 3.8 lpf) two-piece toilet	HIGH EFFICIENCY HIGH EFFICIENCY ROBERT NOTICE AND ADDRESS OF THE PROPERTY NOTICE AND

MATERIAL	Vitreous China
WATER PRESSURE RANGE	35 to 80 PSI
FLUSH SYSTEM	Flushmate IV [™] flushing technology
WATER USAGE	1.0 gpf / 3.8 lpf
WATER SURFACE AREA	9-7/8' X 12-1/4'
ROUGH-IN	Rear outlet
MAP RATING	1,000 grams

TO AD DIAMETED	
TRAP DIAMETER	1-7/8'
TRAP SEAL	2-3/4'
SHIPPING WEIGHT	Model 149 - 60 lbs. (27.2 kg) Model 153 - 41 lbs. (18.5 kg)
WARRANTY	Vitreous China - Limited Lifetime Vessel - Limited Ten Year (Flushmate)

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

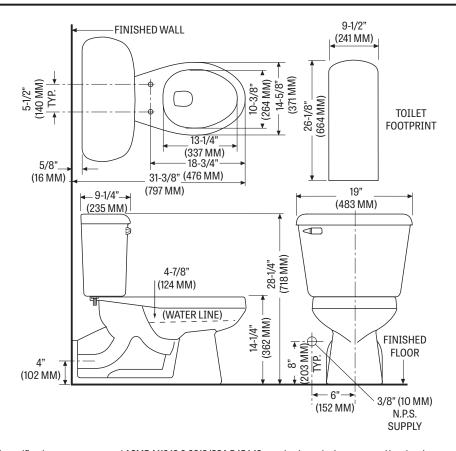

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.

