### 380-377 SUMMIT<sup>®</sup> PRO 1.28

# 

Round Front, Vitreous China, Two-Piece Toilet

### FEATURES

- · High performance MagnaFlush<sup>™</sup> flushing technology
- SmartFasten<sup>™</sup> 3-bolt tank-to-bowl connection
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Round front bowl
- PuraClean<sup>®</sup> easy-to-clean glaze
- Fluidmaster® pilot operated anti-siphon fill valve
- 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- Model 59 color match, metal trip lever
- 12' rough-in
- · 2' glazed trapway
- The Mansfield<sup>®</sup> limited lifetime warranty on china, Five-year limited warranty on tank trim
- · Available in White

#### COMPONENTS

MODEL 380-377 Toilet seat not included	ROUND

MODEL #	DESCRIPTION	CODES/STANDARDS	
380-377	Round front, two-piece toilet. Less toilet seat and supply.		
380	Round front toilet bowl only. Less toilet seat.		
377	Tank and cover only, with left hand, front-mount, color match, metal trip lever. Less supply.		
TANK TRIM & REPLACEMENT PARTS			
59	Trip lever - color match, metal trip lever, left hand		
2036-1212	Summit® 1.28 rigid flapper flush valve		
400A	Fluidmaster® anti-siphon pilot fill valve		
2206	Anti-siphon pilot fill valve (compatible replacement)		
630-0030	Replacement flush valve seal		
386-LID	Tank lid		



## 380-377 SUMMIT<sup>®</sup> PRO 1.28

## 

#### Round Front, Vitreous China, Two-Piece Toilet

### **SPECIFICATIONS**

TANK OPTIONS

lever.

377RH

MODEL #	DESCRIPTION	CODES/STANDARDS
380-377	Round front, (1.28 gpf/4.8 lpf) two-piece toilet	C B HIGH EFFICIENCY


MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ flushing technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	8'X9'
ROUGH-IN	12'
MAP RATING	1,000 grams

Variation of model 377, with right hand trip

TRAP DIAMETER	2'
TRAP SEAL	2-3/8'
SHIPPING WEIGHT	Model 380 - 49 lbs. (22.2 kg) Model 377 - 36 lbs. (16.3 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year

### **TECHNICAL INFORMATION**

Note: these dimensions are nominal and subject to change without notice.

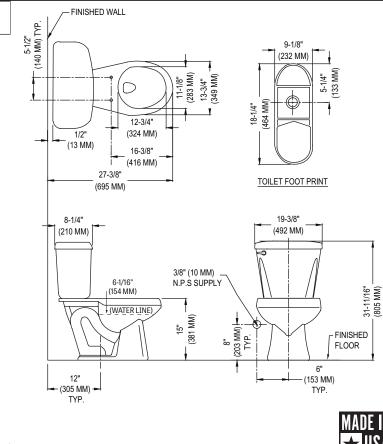

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.