380-377RH **SUMMIT® PRO 1.28**

MANSFIELD®

Round Front, Vitreous China, Two-Piece Toilet

FEATURES

- High performance MagnaFlush™ flushing technology
- SmartFasten™ 3-bolt tank-to-bowl connection
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- · Round front bowl
- PuraClean® easy-to-clean glaze
- · Fluidmaster® pilot operated anti-siphon fill valve
- 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- · Model 59RH color match, metal trip lever
- 12' rough-in
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty on china, Five-year limited warranty on tank trim
- · Available in White



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS	
380-377RH	Round front, two-piece toilet. Less toilet seat and supply.		
380	Round front toilet bowl only. Less toilet seat.		
377RH	Tank and cover only, with right hand, front-mount, color match, metal trip lever. Less supply.	C HIGH EFFICIENCY TOULET	
TANK TRIM & REPLACEMENT PARTS			
59RH	Trip lever - color match, metal trip lever, right hand		
2036-1212	Summit® 1.28 rigid flapper flush valve		
400A	Fluidmaster® anti-siphon pilot fill valve		
2206	Anti-siphon pilot fill valve (compatible replacement)		
630-0030	Replacement flush valve seal		
386-LID	Tank lid		



380-377RH **SUMMIT® PRO 1.28**

MANSFIELD®

Round Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS

MODEL #	DESCRIPTION	CODES/STANDARDS
380-377RH	Round front, (1.28 gpf/4.8 lpf) two-piece toilet	HIGH EFFICIENCY HIGH EFFICIENCY WATER A STATE OF THE ST

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ flushing technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	8'X9'
ROUGH-IN	12'
MAP RATING	1,000 grams


TRAP DIAMETER	2'
TRAP SEAL	2-3/8'
SHIPPING WEIGHT	Model 380 - 49 lbs. (22.2 kg) Model 377RH - 36 lbs. (16.3 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year

TANK OPTIONS

Variation of model 377RH, with left hand trip lever.

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

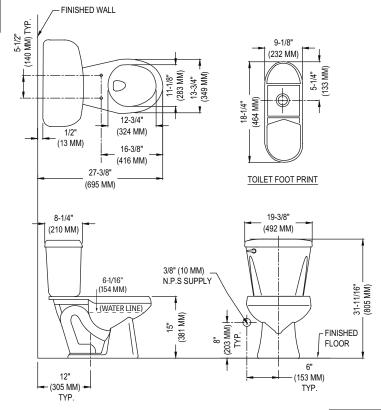

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.

