4197CTK WAVERLY™

MANSFIELD®

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet Kit

FEATURES

- · Complete toilet kit (CTK)
- Uses 20% less water than conventional toilets
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Elongated front, SmartHeight[™] bowl
- High performance MagnaFlush™ flushing technology
- · 3' flush valve
- · Complies with ADA requirements for accessibility
- · Pilot operated anti-siphon fill valve
- 12' rough-in
- · Model 72 metal trip lever with color match ceramic insert
- · 2' glazed trapway
- · The Mansfield® limited lifetime warranty
- · Available in White



MODEL 4197CTK

Complete toilet kit

Toilet seat not included







COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
4197CTK	Elongated front, SmartHeight™ two-piece toilet kit. Includes: toilet seat, wax ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included.	3555		
4197	Elongated front, SmartHeight [™] toilet bowl only. Less toilet seat and supply.	HIGH EFFICIENCY C ADA COMPLIANT		
3195	Tank and cover only. Includes tank trim and left hand, metal trip lever with color match ceramic insert. Less supply.	UNLLI		
TANK TRIM & REPLACEMENT PARTS				
72	Trip lever - metal trip lever with color match ceramic insert, left hand			
2206	Pilot operated fill valve			
630-0207	Replacement flapper			
3195-LID	Tank lid			

4197CTK WAVERLY™

MANSFIELD®

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet Kit

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4197CTK	Elongated front, SmartHeight™ (1.28 gpf/4.8 lpf) two-piece toilet kit	HIGH EFFICIENCY C ADA COMPLIANT

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3' MagnaFlush™ flushing technology
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	6-3/4' X 9-5/8'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2-1/4'
SHIPPING WEIGHT	Model 4197CTK- 94 lbs. (43 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

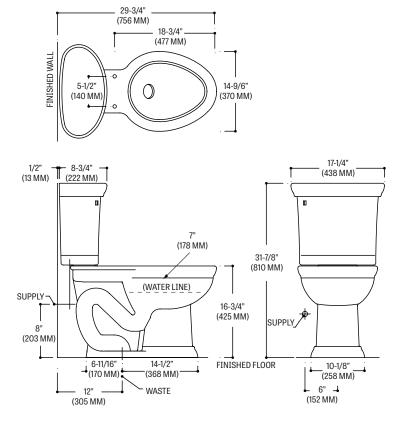

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.