4810-3816RH **CASCADE**°

MANSFIELD®

Round Front, Vitreous China, Two-Piece Toilet

FEATURES

- Uses 20% less water than conventional toilets
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- · Unique rimless, round front bowl
- · 3' flush valve
- · Pilot operated anti-siphon fill valve
- 12' rough-in
- · Model 58RH chrome-plated, plastic trip lever
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty
- · Available in White



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
4810-3816RH	Round front, two-piece toilet. Less toilet seat and supply.			
4810	Round front toilet bowl only. Less toilet seat and supply.			
3816RH	Tank and cover only, with right hand, front-mount, chrome trip lever. Less supply.	HIGH EFFICIENCY C ®		
TANK TRIM & REPLACEMENT PARTS				
58RH	Trip lever - chrome-plated, plastic trip lever, right hand			
2206	Pilot operated fill valve			
216	3' flapper flush valve			
3816-LID	Tank lid			

4810-3816RH **CASCADE**°

MANSFIELD®

Round Front, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
4810-3816F	Round front, (1.28 gpf/4.8 lpf) two-piece toilet	HIGH EFFICIENCY C

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3' flapper
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	6-1/2' X 9-1/4'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	0.1/4!
	2-1/4'
SHIPPING WEIGHT	Model 4810- 44 lbs. (20 kg) Model 3816RH- 31 lbs. (14 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

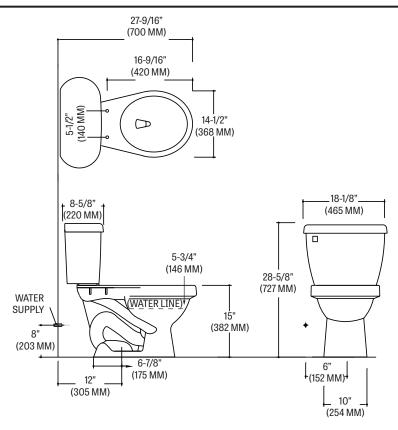

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.