## 710CTK **BROADWAY**™

Elongated SmartHeight™, Vitreous China, Two-Piece Complete Toilet Kit

### FEATURES

- Complete toilet kit (CTK)
- 1.28 gpf / 4.8 lpf high efficiency water consumption
- Elongated SmartHeight<sup>™</sup> bowl
- Skirted bowl design conceals trapway
- · 2-bolt standard tank-to-bowl connection
- 3" flapper flush valve
- Anti-siphon pilot fill valve
- 12" rough-in
- Chrome trip lever
- 2" glazed trapway
- The Mansfield<sup>®</sup> limited lifetime warranty on china; One-year limited warranty on tank trim
- Available in White



#### COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
710CTK	Elongated front, SmartHeight™ complete toilet kit. Includes: slow close toilet seat, wax toilet ring, floor bolts, bolt alcove cover plates, and installation instructions. Water supply hardware not included.			
710A	Tank and cover only, with left hand, side-mount, chrome-plated, metal trip lever. Less supply.	HIGH EFFICIENCY		
710B	Elongated front, SmartHeight™ toilet bowl.			
SB710	Slow close seat			
TANK TRIM & REPLACEMENT PARTS				
71	Trip lever - chrome, side mount, left hand			
630-0710	Replacement 3' rigid flapper w/seal			
90	Anti-siphon pilot fill valve			
710-LID	Tank lid			

## 710CTK **BROADWAY**™

# 

Elongated SmartHeight™, Vitreous China, Two-Piece Complete Toilet Kit

#### **SPECIFICATIONS**


MODEL #	DESCRIPTION	CODES/STANDARDS
710CTK	Elongated SmartHeight™ (1.28 gpf / 4.8 lpf) two-piece toilet kit	HIGH EFFICIENCY

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3" flapper flush valve
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	9" X 7"
ROUGH-IN	12"
MAP RATING	1000 grams

TRAP DIAMETER	2"
TRAP SEAL	2-7/16"
SHIPPING WEIGHT	Model 710CTK- 116 lbs. (53 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

### **TECHNICAL INFORMATION**

Note: these dimensions are nominal and subject to change without notice.

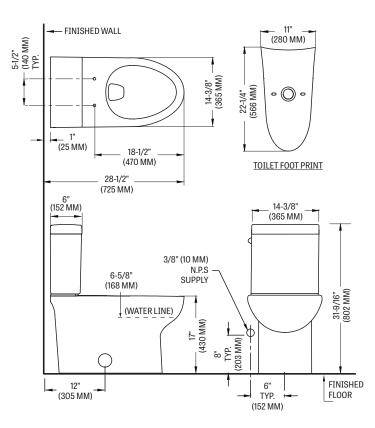

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.