



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Duralock™ quick connect
- Supplied with goose neck spout
- Flexible supplies with 3/8" compression fittings

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force

FLOW

- Spout flow is limited to 1.5 gpm max (5.7 L/min) at 60 psi max

CARTRIDGE

- 1255™ Duralast™ cartridge


STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including ANSI/NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act
- ADA ♿ for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation


Visit www.moen.com/support for complete details and limitations



Chateau®
Single Handle Lever Bar Faucet

Models: 4904 series

NOTE: DESIGNED TO INSTALL
THROUGH 2 HOLES 1-1/4" (32mm)
MIN. DIA. AND 4" (102mm) ON CENTER

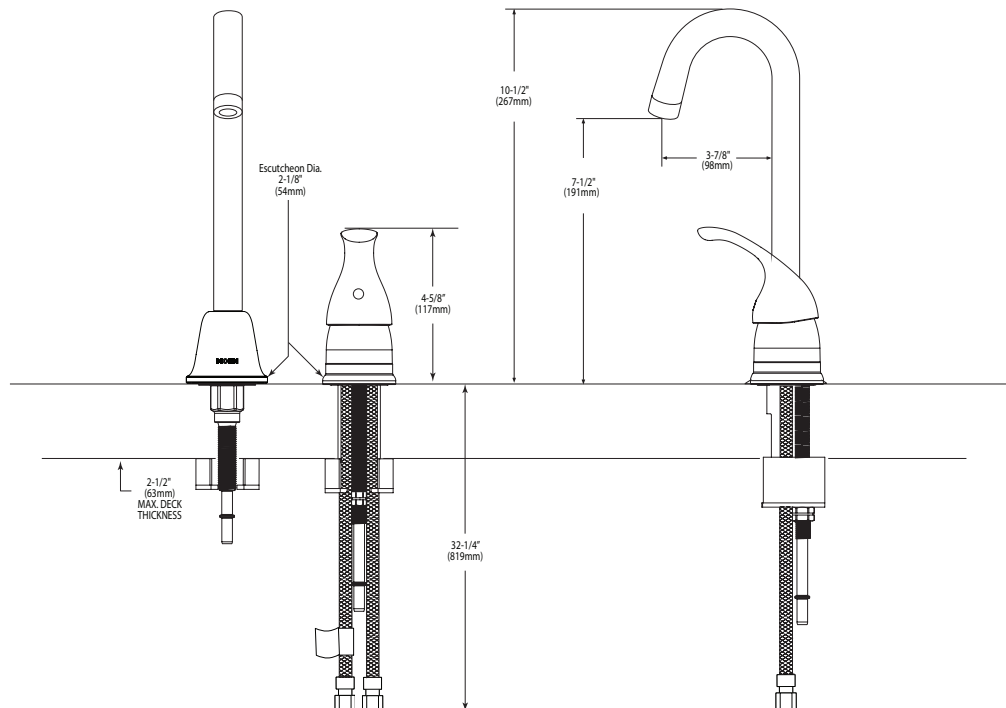

CRITICAL DIMENSIONS

(DO NOT SCALE)