

FAUCET DESCRIPTION

- Metal and brass construction with chrome plated finish
- Shower arm has 1/2" IPS male threads
- Supplied with vandal resistant screws

OPERATION

- Lever style handle with temperature indicators on the escutcheon
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock, and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to restrict the handle travel in the HOT direction
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°

FLOW

- Vandal resistant shower head 2.5 gpm (9.6 L/min) maximum
- Vandal resistant EP model shower head 1.5 gpm (5.7 L/min) at 80 psi

CARTRIDGE

- Pair with a brass Posi-Temp rough-in valve:
- 8370HD*: 1/2" CC connection without integral stops
- 8371HD*: 1/2" CC connection with integral stops
- 8372HD*: 1/2" IPS connection with integral stops
- 8373HD*: 1/2" PEX connection with integral stops
- 8374HD*: 1/2" CPVC connection with integral stops, *Includes the 1222HD Brass Posi-Temp Cartridge
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations


STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF61/9
- EP suffix models are third party certified to WaterSense®

- **ADA** for lever handle


WARRANTY

- Warranted for 5 years against material or manufacturing defects

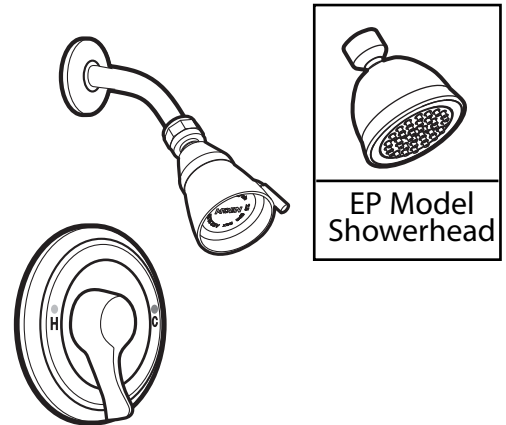

Single-Handle Posi-Temp® Pressure Balancing Shower Trim Only

Model: T8375
T8375EP

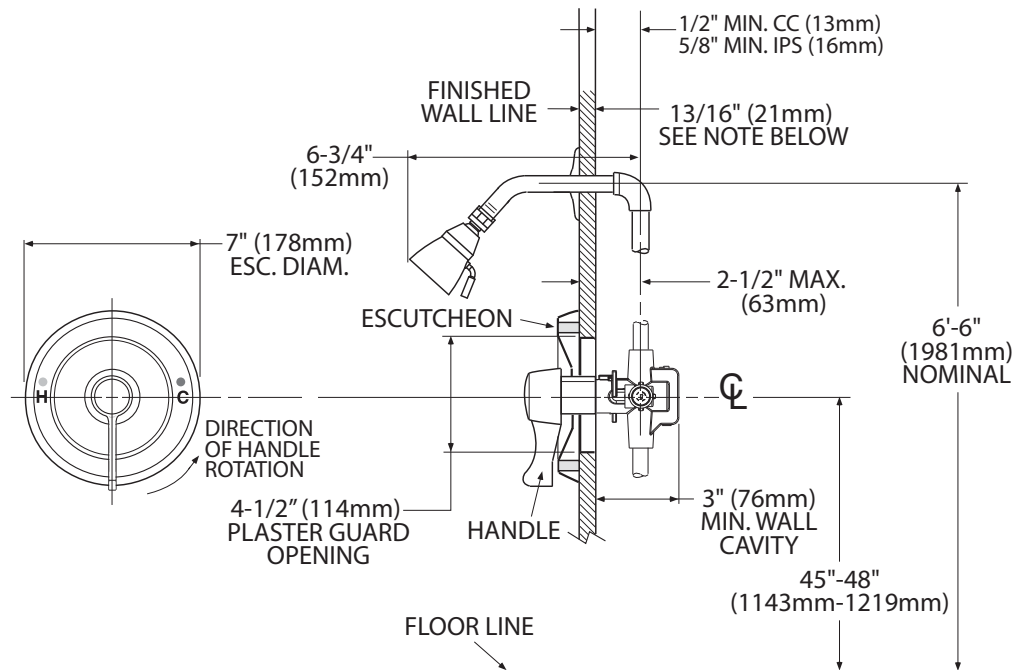

CRITICAL DIMENSIONS

(DO NOT SCALE)