

## DESCRIPTION

- Brass construction
- Valve Kit includes valve and tub spout manifold
- Available with 1/2" CC/IPS, PEX, and Cold Expansion PEX connections
- Valve outlet matches manifold inlet connection type
- 1/4 turn shutoffs included for serviceability

## OPERATION

- Supplied Flush Plug allows testing up to 200 PSI with air (300 PSI water)

## FLOW

- Tub Faucet is designed to deliver 8 GPM/min (30.28 L/min) at 60psi
- **Note:** Installation that is inconsistent with Moen recommendations may degrade flow rate. Moen recommends trim spout extends 3.5" minimum from spout outlet's mid-point to tub's inner wall for optimal performance.

## CARTRIDGE


- Cartridge is supplied in the Wallmount Tub Filler Trim Kit

## STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- **ADA** for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10-year limited warranty when used in a multifamily installation
- 5-year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations


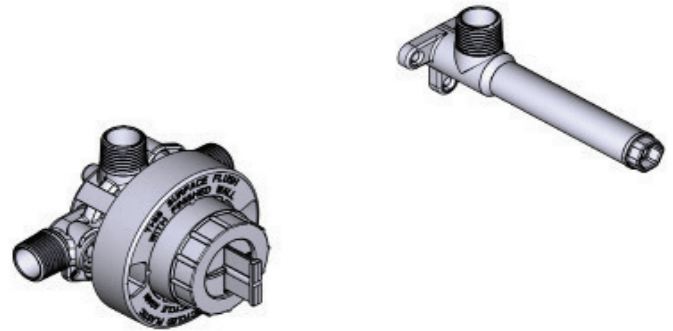


## Rough-in Wall Mount Tub CC/IPS

**MODELS:** WMV130CIS CC/IPS  
WMV130CXS COLD Expansion PEX  
WMV130XS PEX



104465 Thermostatic mixing valve sold separately is certified to ASSE 1070 and CSA B-125.3

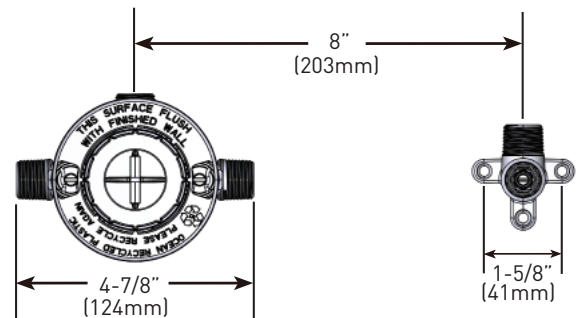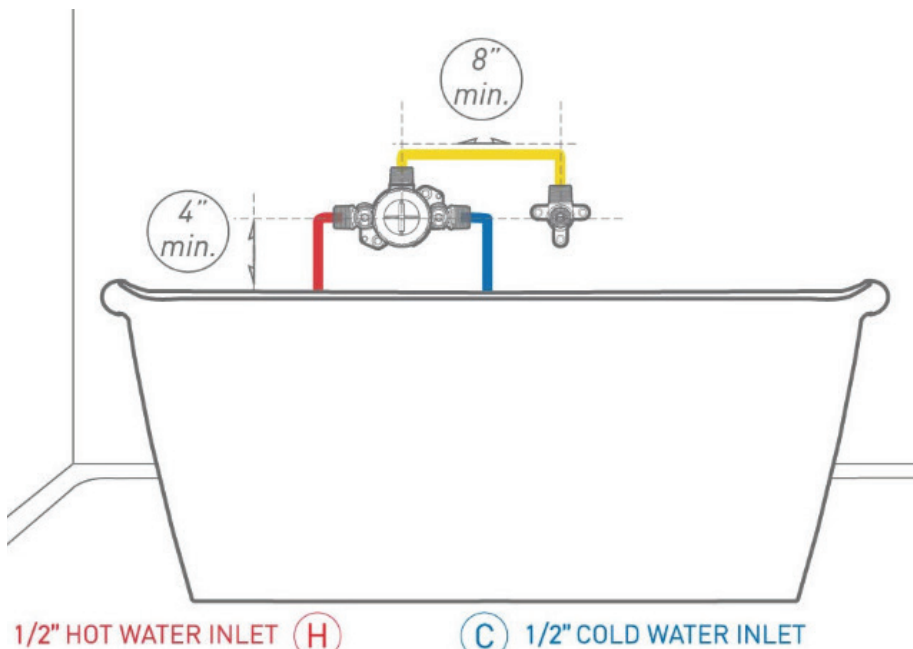

CRITICAL DIMENSIONS  
(DO NOT SCALE)